

Hot & Heavy Collection

Metal



Hot & Heavy Collection



Interdeco™

Metal



Metal loose lay enhanced resilient tile's 18" x 36" format creates bold installations with innovative modern textures. With pops of metallic sheen, this flooring solution appears multi-dimensional and coordinates beautifully with Iconic Earth and other Mohawk Group carpet collections for textural layering and harmonic patterning.



Metal

The natural oxidation of metal when exposed to the elements inspires this pattern, which is available in 12 colors.

Sustainably Beautiful

Metal contains a minimum of 8% bio-based renewable resource content by total product weight. It avoids harmful phthalates by substituting a new bio-based, rapidly renewable plasticizer without sacrificing performance, quality and maintenance.



Metal coordinates beautifully with Iconic Earth (shown) and because it's twice as thick as traditional ERT, transitioning to Iconic Earth or other Mohawk Group carpet tile is seamless.

Iconic Earth

- Celebrates the natural processes of geology with pops of metallic accent
- Features Colorstrand® SD Nylon
- Available on EcoFlex ICT backing
- Install with Flexlok™ tabs for an adhesive free installation



Iconic Earth is a carpet tile collection with patterns that draw inspiration from natural stone formations. The stone visuals celebrate natural processes of geology with pops of sheen morphing and shifting throughout the floor. The Iconic Earth Collection features innovative metallic yarns allowing for a unique lustrous effect that mimics the look of oxidized minerals.



Metalmorphic
Available as 12"x36" tiles in nine colors, Metalmorphic features a metallic accent recalling mineral deposits in natural stone.



Drifted Ground
Mimicking the natural striations of sedimentary rock and natural landscapes, Drifted Ground is available as a 12"x36" tile with nine colors.



Statement Stone
Adapted from the marbling patterns that occur in many stones, Statement Stone is available as a 24"x24" tile with nine colors.




Metal Performance

- A 20 mil wear layer and 0.20"/5mm gauge create a hearty, durable surface that holds up under heavy traffic
- Twice as thick as conventional ERT along with non-skid backing and weight of product keeps tiles in place
- Built-in enhanced acoustical layer for sound reduction, eliminating the need for underlayment
- M-Force™ Enhanced Urethane Finish provides the utmost in beauty and extends the life of the product
- Six Metal colors deliver a comprehensive and versatile resilient tile collection

Loose Lay ERT Construction

Metal features an advanced acoustical layer so thick it eliminates the need for underlayment. Combine that with our M-Force™ ceramic enhanced urethane finish and Metal handles the wear and noise of heavy commercial traffic beautifully. The weight of the product and the unique non-skid backing texture allows for loose lay installation with perimeter glue only.

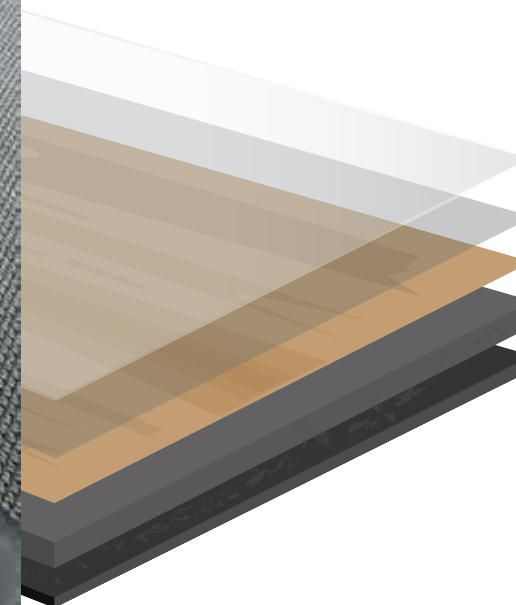

- M-Force™ Enhanced Urethane Finish
- Heavy Commercial Wear Layer
- Decorative Print Film
- Enhanced Acoustical Layer
- Stabilizing Back Layer
- Non-Skid Backing



Metal, 959 So Fetch and 353 Rave Red
Herringbone Installation

Specifications

Style Name / Number
Brand
Product Type

Metal C0059
Mohawk Group - Hard Surface
Loose Enhanced Resilient Tile



DESIGN

Overall Gauge
Wear Layer
Finish
Colors Available / Size

.20" (5mm)
20 mil (0.5mm)
M-Force™ Enhanced Ceramic Urethane
18"x36" - 12 colors

Packaging
Installation
Recommended Adhesive

18 sf per carton; 4 pcs per carton
Loose Lay with Perimeter Glue
Perimeter glue only with MS160 spray. May also use M95.0 Acrylic



PERFORMANCE

Construction
Classification
Squareness
Size and Tolerance
Thickness
Flexibility
Dimensional Stability
Residual Indentation
Slip Resistance
Resistance to Chemicals
Resistance to Light
Resistance to Heat
Critical Radiant Flux

Commercial Grade Loose Lay Resilient Tile
ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
ASTM F2055 - Passes - 0.010 in. max
ASTM F2055 - Passes - ± 0.016 in. per linear foot
ASTM F386 - Passes - Nominal ± 0.005 in.
ASTM F137 - Passes - ≤ 1.0 inch, no cracks or breaks
ASTM F2199 - Passes - ≤ 0.024 in. per linear foot
ASTM F1914 - Passes - Average less than 8%
ASTM C1028 - Passes
ASTM F925 - Passes - No Change or Slight Change
ASTM F1515 - Passes - $\Delta E \leq 8$
ASTM F1514 - Passes - $\Delta E \leq 8$
ASTM E648 - Passes - ≥ 0.45 watts/cm², Class 1



SUSTAINABILITY

Certification
Renewable Resource
Content

FloorScore® Certified SCS-FS-01495
Minimum 8% bio-based renewable resource content by total product weight



SERVICE

Warranty

Limited 10 Year Commercial

The Mohawk Group logo is a white square icon containing three vertical bars of varying heights, resembling a stylized 'M' or a bar chart.

Mohawk Group


Metal

Collection	Hot and Heavy
Style Name	Metal
Style Number	C0059
Product Type	LVT
Size	18" X 36"


Feature	Description
Overall Thickness	5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force Ultra
Squareness	ASTM F2055 - Passes - 0.010 in. max
Flexibility	ASTM F137 - Passes - ≤ 1.0 in., no cracks c
Square Foot per Carton	18
Pounds per Carton	33.36
Classification	ASTM F1700 - Class III, Type B - Embosse




Recommended Installation Methods




Monolithic



Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Golden Yellow

Color code: 132
Style number: C0059



Viva Gold

Color code: 258
Style number: C0059



My Precious

Color code: 268
Style number: C0059



Rave Red

Color code: 353
Style number: C0059



Vogue Violet

Color code: 464
Style number: C0059



Freshwater Blue

Color code: 525
Style number: C0059



Tempo Teal

Color code: 556
Style number: C0059



Blue Steel

Color code: 585
Style number: C0059



Lemon Lime

Color code: 631
Style number: C0059



On The Line

Color code: 859
Style number: C0059



Proper Gray

Color code: 929
Style number: C0059



So Fetch

Color code: 959
Style number: C0059



Performance

Feature	Description
Dimensional Stability	ASTM F2199 - Passes - \leq 0.024 in. per linear foot
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Resistance to Chemicals	ASTM F925 - Passes - No Change or Slight Change
Resistance to Heat	ASTM F1514 - Passes - \leq 8
Resistance to Light	ASTM F1515 - Passes - \leq 8
Critical Radiant Flux	ASTM E648 - Passes - \leq 0.45 watts/cm ² , Class 1

Sustainability

Feature	Description
Floor Score	Floor Score Certified
Certification Detail	Minimum 8% bio-based renewable resource content by total product weight
Country of Origin	China
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO ₂ e/ft ²
Embodied Carbon	1.11 kg CO ₂ e/ft ²

Warranties

Limited 20 Year M-Force Ultra Commercial Warranty

