



 Interdeco™

Dexterity

Statement Fabric Interthread



Interthread 949 Light Slate, Statement Fabric 978 Mid Grey (Brick Ashlar Installation)
Cover: Interthread 949 Light Slate, Living Local 949 Gorgeous Gray (Brick Ashlar Installation)






Living Local GLUE DOWN ERT

Living Local ERT celebrates the vibrant spirit of our local communities. Proudly manufactured in the US, the collection draws inspiration from natural wood visuals and features colors ranging from rich, warm browns to cool grays. The aesthetically flexible shades and textures are designed to fit any interior, providing a core collection of ERT styles that you can use to bring homegrown appeal to a wide variety of projects.



FEATURES

- M-Force™ Enhanced Urethane finish and 20 mil wear layer protect against commercial traffic
- Wood textures emulate natural materials
- No polish maintenance reduces occupied costs
- Designed to coordinate with a variety of Mohawk Group carpet collections
- Diverse color line spans from traditional to contemporary influences
- Made in America

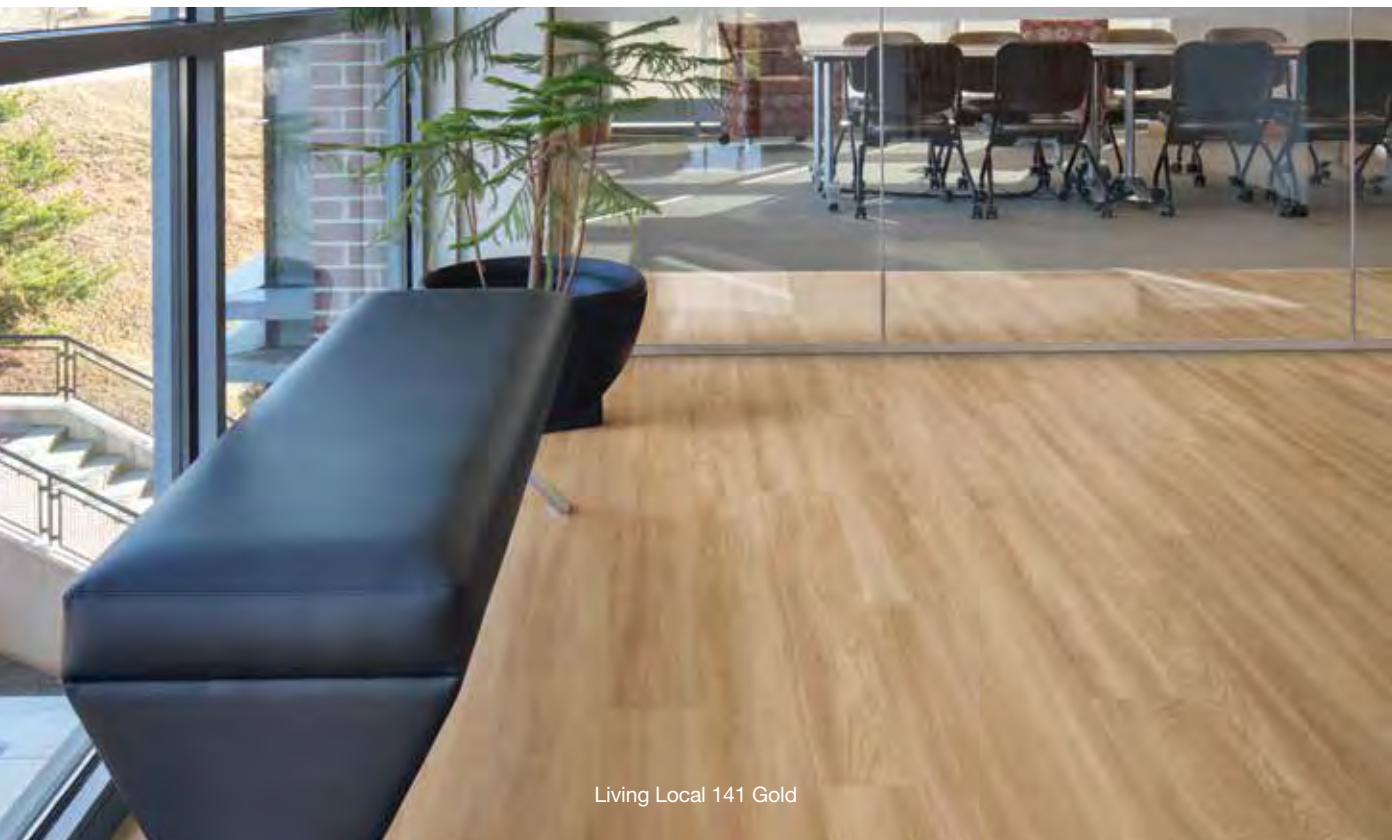

Living Local 141 Gold

EcoFlex™ Matrix SUSTAINABLE CARPET TILE BACKING

Mohawk Group continues its dedication to sustainable solutions with EcoFlex™ Matrix, the next generation in carpet tile backing. Using advanced materials and patent pending engineering, EcoFlex Matrix lowers environmental impact without sacrificing performance. EcoFlex Matrix simplifies floor preparation and installation, greatly reduces sub-floor moisture concerns, and is easier to ship and handle.



PERFORMANCE


- Provides permanent dimensional stability
- Tiles are impervious to moisture damage from spills and water extraction cleaning
- Up to Lifetime Limited Carpet Tile Warranty for: Wear, Static Protection, Edge Raveling/Zippering, Delamination, Dimensional Stability*
- Seamless transitions between carpet and hard surface flooring with Mohawk Group's 2.5mm ERT resilient products

INSTALLATION

- Simplifies complex floor preparation with no need to encapsulate old adhesives**
- Greatly reduces sub-floor moisture concerns and saves money on mitigation
- Worry free installation with no visible moisture present using our Flexlok Tab System
- Superior construction offers reliability for the life of your installation

SUSTAINABILITY

- EcoFlex Matrix is manufactured using less energy than other carpet tile products
- Polyolefin backing contains no plasticizers
- Contains a minimum of 40% pre-consumer recycled content based on total product weight***
- May contribute to or comply with LEEDv4, Living Building Challenge, and WELL Building Standard
- CRI Green Label Plus certified
- Declare Red List Free
- Recyclable through Mohawk's ReCover Program
- Able to ship more per box resulting in a lower environmental impact from transportation

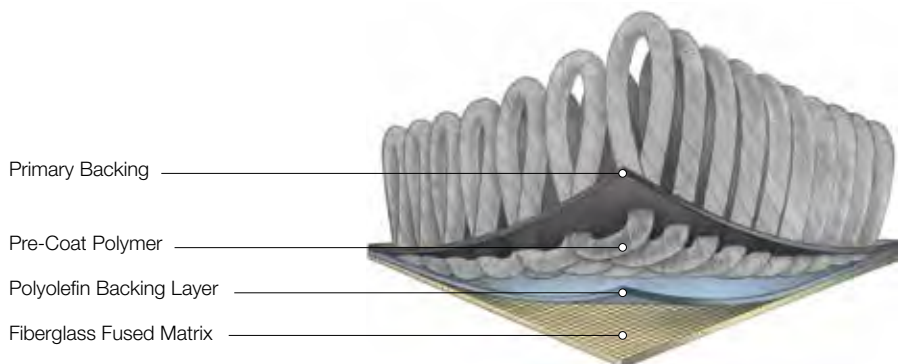

* Lifetime or 10 Year Limited Warranty varies by fiber type. Please see specifications for details

**Consult Mohawk Group Installation Instructions for any applicable restrictions

***Recycled content claim third party verified by UL (Underwriters Laboratory)



EnviroStrand™ SD

EnviroStrand solution-dyed fiber aligns Mohawk Group's industry leadership in sustainability and design to create reliable, high performance, visually stunning carpet. Giving new purpose to discarded plastic bottles by turning them into PET carpet fiber, which requires less energy to manufacture, Mohawk Group utilizes a patented process that enhances the strength of the yarn while incorporating a multi-step purification process that ensures that the carpet resists dirt, grime and contaminants. EnviroStrand fiber is also offered in a flexible collection of color options that is used to produce new product styles.



PERFORMANCE


- An amazing range of style and color options available for design flexibility
- EnviroStrand™ SD is constructed with our patented technology, providing the ultimate innovation in PET carpet
- Mohawk Protection Plus Soil & Stain Resistant Technology
- Ease of maintenance

WARRANTY

- 10 Year Limited Warranty for: Wear, Static, Stain resistance, Colorfastness to Light, Colorfastness to Atmospheric Contaminants

SUSTAINABILITY

- Contains a minimum of 90% post-consumer recycled content
- Requires less energy to produce in the manufacturing process
- Through our patented process, Mohawk recycles 6.2 billion PET bottles every year. That equals about 45% of all plastic bottles collected in North America, and if placed end to end, the bottles would circle the earth 31.4 times
- CRI Green Label Plus® certified

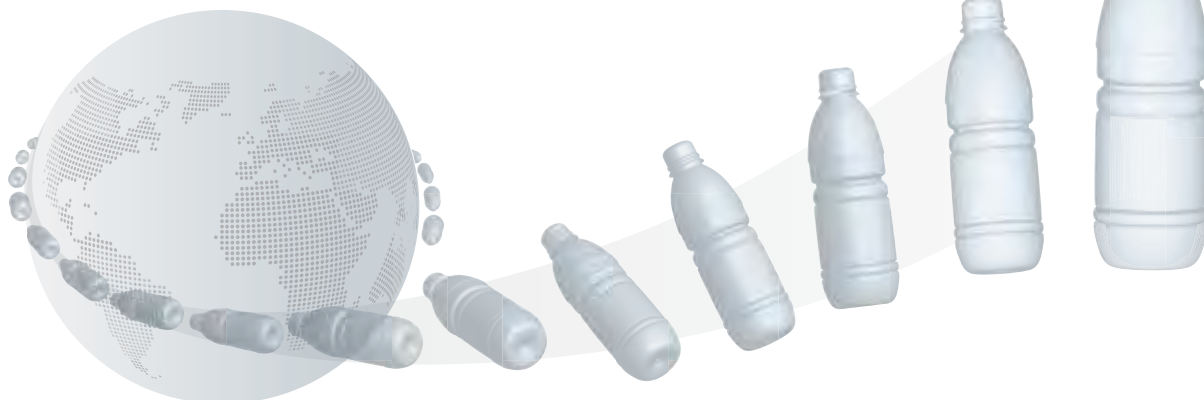

Specifications

Statement Fabric BT448 / QB448
Interthread BT449 / QB449

DESIGN

Size	24" x 24" (.6096m x .6096m)
Surface Appearance	Textured Patterned Loop
Fiber Type	Envirostrand™ PET
Dye Method	Solution Dyed
Installation Methods	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic
Colors Available	6

PERFORMANCE

Construction	Tufted
Gauge	1/12" (47.00 rows per 10cm)
Soil Release Technology	EcoSentry Soil Protection
Backing Material	EcoFlex Matrix
Flammability	ASTM E 648 - Class 1 (Glue Down)
Smoke Density	ASTM E 662 - Less than 450
Static Propensity	AATCC - 134 Under 3.5 KV

SUSTAINABILITY


Certification	Declare Red List Free
Indoor Air Quality	Green Label Plus #100055

SERVICE

Warranties	10 Year Limited Wear Warranty, 10 Year Limited Static Protection, 10 Year Stain Resistance Warranty, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants
------------	--



Installation Instructions:



Mohawk Group warrants its adhesives for the life of the original installation only when a Mohawk Group style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Group adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.


For current and complete specifications please visit www.mohawkgroup.com



Produced with recycled materials

Statement Fabric

Collection	Dexterity
Style Name	Statement Fabric
Style Number	BT448
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Installation	Quarter Turn, Monolithic, Vertical Ashlar,

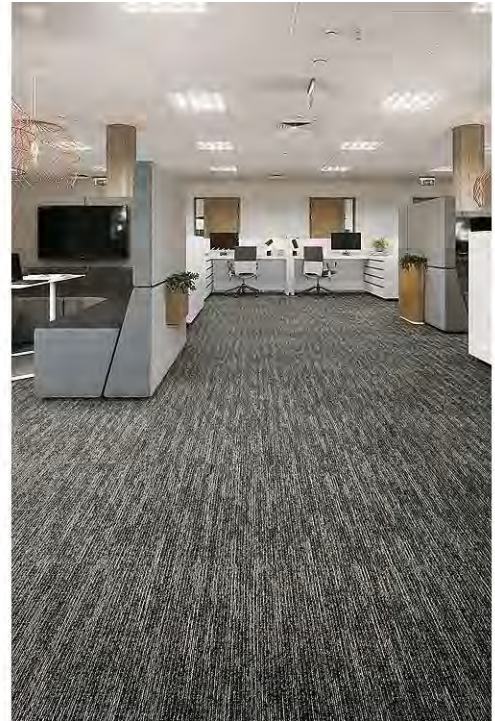


Feature	Description
Backing Material	EcoFlex Matrix
Fiber Type	EnviroStrand™ PET
Dye Method	Solution Dyed
Installation Methods	Quarter Turn, Monolithic, Vertical Ashlar,
Stitches per Inch	11 (43.31 per 10cm)
Density	7783
Tufted Pile Weight	16.00 oz/yd2 (543 g/m2)
Surface Texture	Textured Patterned Loop


Recommended Installation Methods




Brick Ashlar



Monolithic



Quarter Turn



Vertical Ashlar

Colorways



Deep Navy

Color code: 559
Style number: BT448



Beige Tone

Color code: 828
Style number: BT448



Neutral MIX

Color code: 888
Style number: BT448



Light Slate

Color code: 949
Style number: BT448



Mid Grey

Color code: 978
Style number: BT448



Dark Charcoal

Color code: 989
Style number: BT448

Performance

Feature	Description
Gauge	1/12 (47.00 rows per 10 cm)
Foot Traffic Recommendation TARR	Heavy
Flammability	ASTM E 648 Class 2 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Soil Release Technology	EcoSentry Soil Protection

Sustainability

Feature	Description
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO ₂ e/ft ²
Embodied Carbon	1.1 kg CO ₂ e/ft ²
Total Recycled Content	69%
Pre-Consumer Recycled Content	44%
Indoor Air Quality	GLP 100055
TVOC Range	0.5 mg/m ³ or less
Red List Free	True
Declare Label	Envirostrand PET Tile on EcoFlex Matrix
Mindful Materials	Participates in Mindful Materials Library
Take Back Program	ReCover Program
LEED Credit Potential	LEED Eligible

Warranties

10 Year Limited Carpet Tile Warranty, 10 Year Limited Static Protection, 10 Year Stain Resistance Warranty, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants

Interthread

Collection	Dexterity
Style Name	Interthread
Style Number	BT449
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Installation	Quarter Turn, Monolithic, Vertical Ashlar,




Feature	Description
Backing Material	EcoFlex Matrix
Fiber Type	EnviroStrand™ PET
Dye Method	Solution Dyed
Installation Methods	Quarter Turn, Monolithic, Vertical Ashlar,
Stitches per Inch	11 (43.31 per 10cm)
Density	6776
Tufted Pile Weight	16.00 oz/yd2 (543 g/m2)
Surface Texture	Textured Patterned Loop


Recommended Installation Methods




Brick Ashlar



Monolithic



Quarter Turn



Vertical Ashlar

Colorways



Deep Navy

Color code: 559
Style number: BT449



Beige Tone

Color code: 828
Style number: BT449



Neutral MIX

Color code: 888
Style number: BT449



Light Slate

Color code: 949
Style number: BT449



Mid Grey

Color code: 978
Style number: BT449



Dark Charcoal

Color code: 989
Style number: BT449

Performance

Feature	Description
Gauge	1/12 (47.00 rows per 10 cm)
Foot Traffic Recommendation TARR	Heavy
Flammability	ASTM E 648 Class 2 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Soil Release Technology	EcoSentry Soil Protection

Sustainability

Feature	Description
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO2e/ft2
Embodied Carbon	1.1 kg CO2e/ft2
Total Recycled Content	69%
Pre-Consumer Recycled Content	44%
Indoor Air Quality	GLP 100055
TVOC Range	0.5 mg/m3 or less
Red List Free	True
Declare Label	Envirostrand PET Tile on EcoFlex Matrix
Mindful Materials	Participates in Mindful Materials Library
Take Back Program	ReCover Program
LEED Credit Potential	LEED Eligible

Warranties

10 Year Limited Carpet Tile Warranty, 10 Year Limited Static Protection, 10 Year Stain Resistance Warranty, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants