



Printed on 50% post consumer waste (PCW) fiber manufactured using wind power.

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

interface.com

United States Headquarters

1280 West Peachtree Street NW Atlanta, GA 30309 1.800.634.6032

Canadian Headquarters

233 Lahr Drive Belleville, ON K8N 5S2 1.800.267.2149 ext.52128

Brazilian Headquarters

Av. Das Nações Unidas 14261 25 andar, sala 25 -122, Brooklin Paulista São Paulo SP 04578 - 000 Brasil

+ 5511.2196.0900

Latin American Headquarters


Montes Urales # 415 Piso 6 Lomas de Chapultepec Miguel Hidalgo, CDMX 11000 Mexico

+ 52.55.2791.6812

CIM # IFS00850 07/2021



Climate change is undeniable. And reversible. Our mission is to prove it. Join the #ClimateTakeBack and help create a climate fit for life.

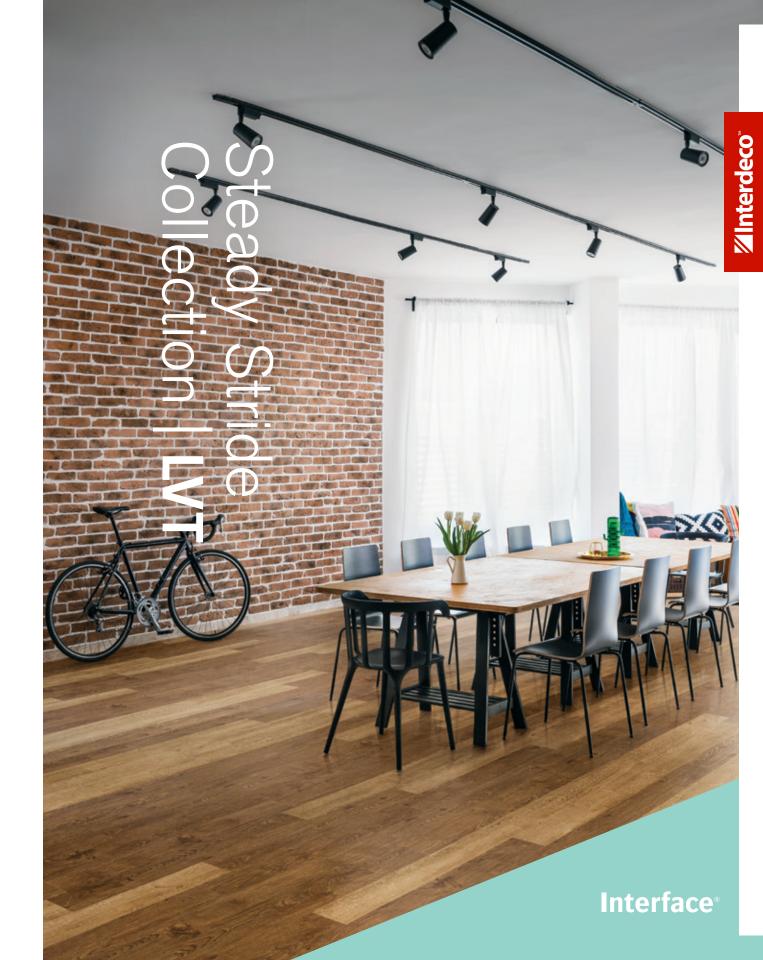

A shrewd balance of design and performance, the Steady Stride™ Collection features a core group of LVT designs that you'll come back to again and again. Steady Stride Woodgrains introduce a slimmer dimension on the floor with its 12.5cm x 1m planks, while its classic Steady Stride Concretes come in our standard 50cm x 50cm square format.

As Criterion LVT products, Steady Stride planks and squares are 3 mm thick, including a 22 mil wear layer with Ceramor™ coating backed by a 15-year warranty

Steady Stride LVT is fully recyclable through our **ReEntry**® program and contains a significant percentage of recycled content. As part of our global product portfolio, Steady Stride is carbon neutral. Impactful on the floor. Impactful on the planet. **Carbon Neutral Floors™**



MInterdeco

Specifications

Steady Stride[™] Concretes Colorline

Product Number Steady Stride Woodgrains - B001 Product Number Steady Stride Concretes - B002 Luxury Vinyl Tile Class III Printed Vinyl Tile Product Construction Class / ASTM F1700 22 mil

Wear Layer Thickness Total Thickness 3mm

Commercial Grade Backing Class Ceramor™ Coating

12.5cm x 1m (4.923in x 39.38in) Nominal Dimensions -Woodgrains (Planks) 50cm x 50cm (19.69in x 19.69in)

Nominal Dimensions -Concretes (Squares)

Steady Stride Woodgrains -

specification on interface.com

for details

Steady Stride Concretes -*Now with Recycled Content View the full product

GREENGUARD Gold Indoor Air Quality FloorScore® Certified for low-VOC emissions

CDPH 01350 Compliant Carbon Offsets Carbon Neutral Floors™ **Environmental Certifications** NSF/ANSI 332 Silver

LEED v4 Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR End of Life Fully Recyclable LVT to Carpet Tile Backing through ReEntry™ Installation Methods

Ashlar, Herringbone

Ashlar, Brick, Monolithic, Non Directional, Quarter-Turn












B00201 DOVE



B00202 IRON

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see our full LVT product disclaimer at interface.com.

Steady Stride[™] Woodgrains Colorline





B00101 BISCUIT







B00103 MALT

B00104 DRIFTWOOD





B00105 NICKEL

B00106 BLONDE





B00107 BARLEY

B00108 COPPER COIN





B00109 ELM

B00110 MOCHA





B00111 NUTMEG


B00112 COCOA





B00113 GRAPHITE

B00114 STERLING

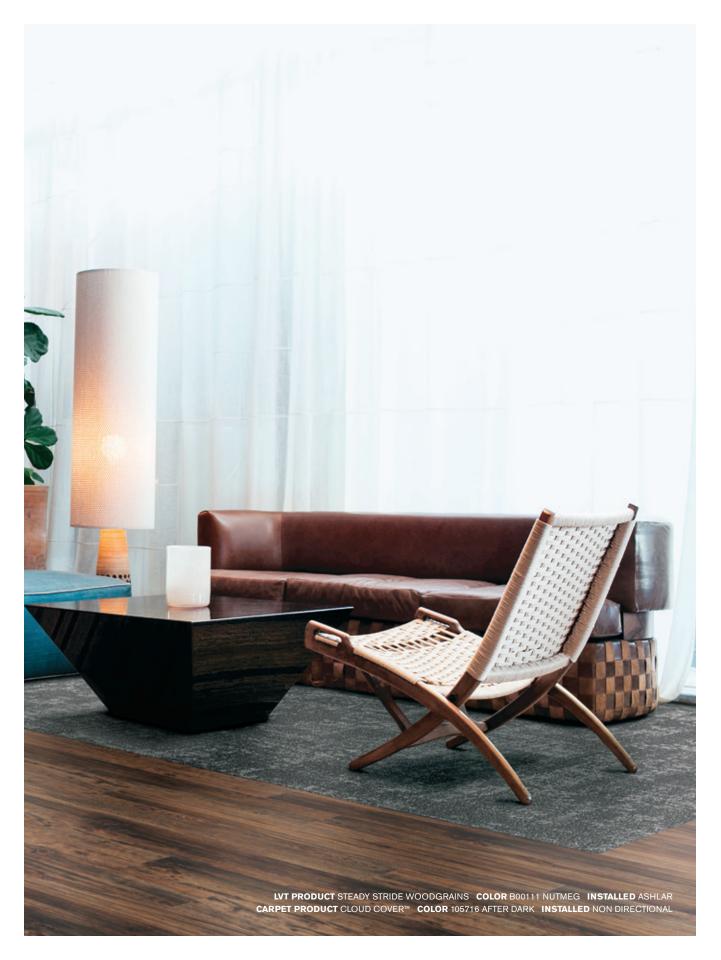

Why Our Modular Resilient Criterion LVT?

Budget Friendly.

Criterion LVT is an affordable solution with the right mix of aesthetic and performance attributes.

Easy Maintenance.

Routine maintenance is easy. Just sweep and mop to keep your floor looking good.

Integrated System.

Criterion LVT is part of our dimensionally compatible modular system of LVT, carpet tile and rubber, expanding your design possibilities with a wide range of shapes, colors, patterns and textures.

Circular System.

Keep flooring out of the landfill. All Interface LVT is produced with a controlled material stream so it can be reclaimed and recycled into our recycled content backing through our ReEntry™ program.



High Performance from Top to Bottom.

- **1.** Ceramor™ Coating. UV stabilized protective coating with ceramic finish minimizes everyday scratching and scuffing.
- **2.** Wear Layer. High quality 22 mil layer enables 15 years of resilience and performance.
- **3.** Print Film. Creates visual appeal with beautiful design.
- **4.** Core Sheet. Provides durability and stability.
- **5.** Backing. Provides resistance to residual indentation.

Third Party Certification Our Carbon Neutral Floors program is annually verified by a third party.







Third Party Certification.

Carbon Neutral Floors. All of the flooring products that we sell–carpet tile, LVT and rubber–are carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

Environmental Product Declaration (EPD). Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

Sustainable Assessment. Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire life cycle.

Indoor Air Quality. All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is GREENGUARD Gold and FloorScore® Certified and CDPH 01350 compliant, assuring very low emissions of VOCs.

