

ARDEX GPS™

General Patch & Skimcoat

Suited for skim coating prior to installing finished floor. Hardens quickly without shrinking.

Install over: interior concrete, wood, ceramic tile, and cutback and other non-water soluble adhesive residues on concrete; use over vinyl composition tile (VCT) and as an embossing filler for residential sheet vinyl

Key Features

- Portland cement-based
- Trowelable
- Interior use
- Can be used as an embossing leveler

Installation


- **Packaging:** 25 lb. (11.34 kg)
- **Coverage:** Approx. 700 to 800 sq. ft. (65 to 74 m²) at a skim coat
- **Thickness:** Featheredge up to 1/2" (12 mm)
- **Pot life:** 15 minutes
- **Mixing ratio for embossing leveler:**
 - 2 quarts (1.9 liters) of ARDEX E 25 and 3 quarts (2.8 liters) of water per bag
- **Walkable:** 30 minutes
- **Install floor coverings:** 1 to 2 hours

Performance

- **ASTM C109 mod (air cure only) Compressive Strength:** 4000 psi (281 kg/cm²) at 28 days
- **VOC:** 0



ARDEX Choice Contractor™
E.F. Marburger - Fishers, IN

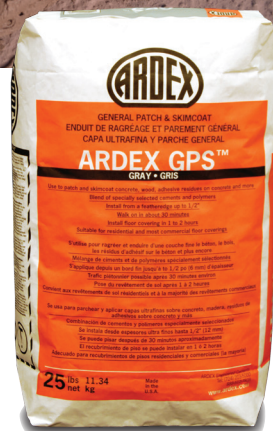

SUBSTRATE
PREPARATION



AMERICAS

888-512-7339

+1-724-203-5000

www.ardexamericas.com

AF205 11/14