



VTi® CELTIC NEO RF EMITTER | SINGLE CHANNEL


6-700-AT-C1R01



FEATURES

- Compatible with VTi® Celtic RF Motors.
- Can control an individual motorized shade or a group of motorized shades.
- Also available in 6 and 16 channels versions.
- Easy programming and installation.


IN THE BOX



TECHNICAL SPECS

Model	6-700-AT-C1R01
Channels	1 Channel
Color	White
Net Weight	0.13 lb 59 g
Gross Weight	0.17 lb 77 g
Radio Frequency	433.92 MHz
Index Protection Rating	IP 20
Radiated Power	≤10mW
Battery Type	3V CR2032 (included)
Range	150 ft 45 m (free field)
Working Temperature	-17 ~ 140°F -27 ~ 60°C
Certificates	FCC & CE Complaint
Price	--

DIMENSIONS

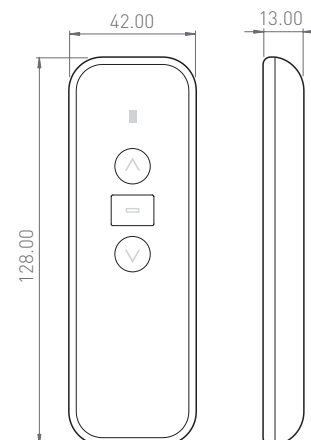


*All measurements are reflected in millimeters.



VTi® CELTIC NEO RF EMITTER | SIX CHANNELS

6-700-AT-C1R06

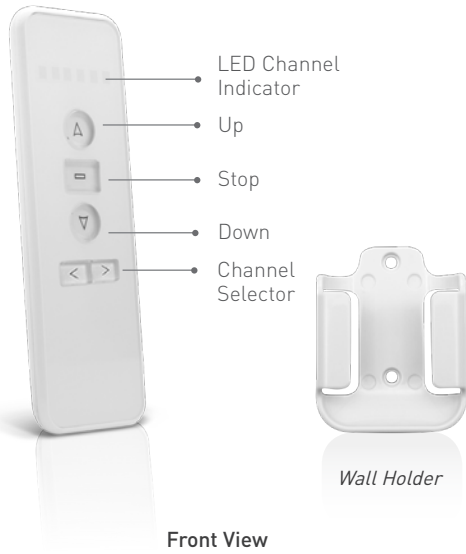


FEATURES

- Compatible with VTi® Celtic RF Motors.
- Each channel can control an individual motorized shade or a group of motorized shades.
- Also available in 1 and 16 channels versions.
- Easy programming and installation.
- Additional auto programmed channel that controls all the motors linked to the remote.


TECHNICAL SPECS

Model	6-700-AT-C1R06
Channels	6 Channels
Color	White
Net Weight	0.13 lb 59 g
Gross Weight	0.17 lb 77 g
Radio Frequency	433.92 MHz
Index Protection Rating	IP 20
Radiated Power	≤10mW
Battery Type	3V CR2032 (included)
Range	150 ft 45 m (free field)
Working Temperature	-17 ~ 140°F -27 ~ 60°C
Certificates	FCC & CE Compliant
Price	--

IN THE BOX



DIMENSIONS

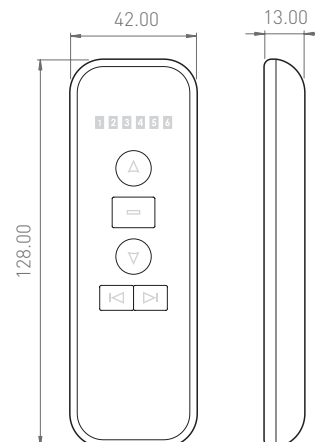

*All measurements are reflected in millimeters.



VTi® CELTIC NEO RF EMITTER | SIXTEEN CHANNELS

6-700-AT-C1R16



FEATURES

- Compatible with VTi® Celtic RF Motors.
- Each channel can control an individual motorized shade or a group of motorized shades.
- Also available in 1 and 6 channels versions.
- Easy programming and installation.
- Additional auto programmed channel that controls all the motors linked to the remote.

TECHNICAL SPECS

Model	6-700-AT-C1R16
Channels	16 Channels
Color	White
Net Weight	0.14 lb 64 g
Gross Weight	0.18 lb 82 g
Radio Frequency	433.92 MHz
Index Protection Rating	IP 20
Radiated Power	≤10mW
Battery Type	3V CR2430 (included)
Range	150 ft 45 m (free field)
Working Temperature	-17 ~ 140°F -27 ~ 60°C
Certificates	FCC & CE Compliant
Price	--

IN THE BOX




Wall Holder



Screws for Wall Holder

DIMENSIONS

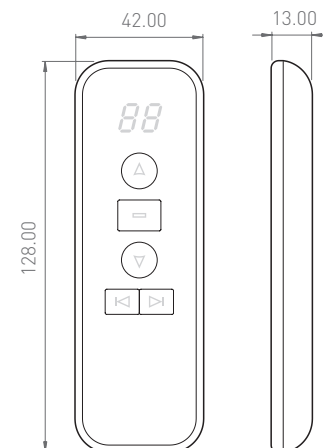

*All measurements are reflected in millimeters.