



Weldlok®

Cost Effective Standard Performance

Primary Backing

//Interdeco

Thermoset Adhesive

Reinforced Woven Synthetic

Weldlok® is the Mohawk Group's standard broadloom backing system specifically designed for commercial applications. The Weldlok backing is laminated to our products utilizing a commercial thermoset adhesive. This adhesive is designed to encapsulate and penetrate the carpet back stitch in the main application coat, while the second application coat secures the secondary backing to the carpet substrate for a cost effective performance standard.



PERFORMANCE

- Standard backing specifically designed for commercial applications
- Excellent pattern match capabilities
- For use with direct glue or stretch in installations
- 10 year Limited Warranty
- Excellent choice for most commercial environments



 Standard performance backing system for the most budget conscious projects



- Recyclable
- May contribute to or comply with LEED credits MR 4.0, MR 5.0, IEQ 4.3 and innovation credit for NSF 140
- Certified Gold in accordance with NSF / ANSI 140
- Certified low VOC's under CRI Green Label Plus Program
- Compliant with LEED EQ 4.1 low VOC emitting when installed with Mohawk Group recommended adhesive and seam sealer
- Declare label and HPD information available



 Products available through Quickship offering (up to 2,000 square yards within 10 business days)

*See Mohawk Group official warranty documents for further details at www.mohawkgroup.com LEED and the related logo is a trademark owned by the U.S. Green Building Council and is used with permission. ſ۵ BROADLOOM

Brand	Bigelow			
Style Name / Number	Mindful / BC397 / BQ397			
Construction	Tufted			
Surface Appearance	Level Loop			
Gauge	1/10" (39.37 rows per 10 cm)			
Dye Method	Solution Dyed			
Fiber Type	Envirostrand [™] PET			
Stain Release Technology	Sentry Plus Stain Protection			
Soil Release Technology	Sentry Soil Protection			
Backing Material	Weldlok®			
Indoor Air Quality	Green Label Plus Certified # 0350			
Width	12' width (3.66m) Not available in 15 ft width			
Pattern Repeat	None			
Flammability	ASTM E 648 Class 1 (Glue Down)			
Smoke Density	ASTM E 662 Less than 450			
Static Propensity	AATCC-134 Under 3.5 KV			
Warranties: Lifetime Limited Wear Warranty, 10 Year Limited Static				
Protection, 10 Year Stain Resistance Warranty, 10 Year Limited				
Colorfastness to Light, 10 Year Limited Colorfastness to				
Atmospheric Contaminants				

ß BROADLOOM

Construction Surface Appearance Gauge Dye Method	Mindful 26 / BC396 / BO396 / BC412 (15 ft) Tufted Level Loop 1/10" (39.37 rows per 10 cm) 100% Solution Dyed Envirostrand [™] PET Sentry Plus Stain Protection Sentry Soil Protection Weldlok [®] Green Label Plus Certified # 0350 12' width (3.66m) or 15' width (4.57m) None ASTM E 648 Class 1 (Glue Down) ASTM E 648 Class 1 (Glue Down) ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV Wear Warranty, 10 Year Limited	BROADLOOM G	Construction	Mindful 26 Unitary / BC402 / BQ402 Tufted Level Loop 1/10" (39.37 rows per 10 cm) 100% Solution Dyed Envirostrand [™] PET Sentry Plus Stain Protection Sentry Soil Protection Weldlok® Unitary Green Label Plus Certified # 0350 12" width (3.66m) Not available in 15 ft width None ASTM E 648 Class 1 (Glue Down) ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV Wear Warranty, 10 Year Limited Static stance Warranty, 10 Year Limited
Colorfastness to Light, 10 Year Limited Colorfastness to		Colorfastness to Light, 10 Year Limited Colorfastness to		

Atmospheric Contaminants

Mohawk Group

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

you not a data sets representance on manufacturing determination of a set of the set of

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com

recover

Bigelow

Brand

Construction.....

Surface Appearance..... Level Loop

Pattern Repeat..... None

Atmospheric Contaminants

Atmospheric Contaminants

Gauge 1/10" (39.37 rows per 10 cm) Dye Method..... 100% Solution Dyed Fiber Type Envirostrand™ PET Stain Release Technology Sentry Plus Stain Protection Soil Release Technology...... Sentry Soil Protection Backing Material Weldlok®

Indoor Air Quality..... Green Label Plus Certified # 0350

Flammability..... ASTM E 648 Class 1 (Glue Down) Smoke Density..... ASTM E 662 Less than 450 Static Propensity AATCC-134 Under 3.5 KV Warranties: Lifetime Limited Wear Warranty, 10 Year Limited Static Protection, 10 Year Stain Resistance Warranty, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to

Width..... 12' width (3.66m) or 15' width (4.57m)

Ľ٩

BROADLOOM

Style Name / Number Mindful 20 / BC395 / BC395 / BC411 (15 ft) Tufted





*Navy 599



*678 Greenery










*Wheat 758 *Stoney 788


*New Colors for 2019









Pewter 949



Nickel 959



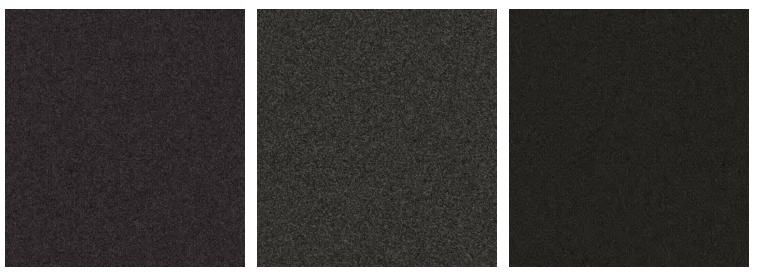

*Twilight 977

Charcoal 979

Onyx 999

*New Colors for 2019



