



Second Home



For a generation that is constantly on the move, Second Home provides an ever subtle but meaningful connection with home. This collection of 13 classic wood visuals in contemporary colors that range from rich earth tones to chic greys invites end users to pull up a chair and make themselves comfortable in any commercial space.

Featured on Mohawk Group's Rigid Click LVT platform with an attached cushion backing, this collection helps create the quietest spaces resilient flooring can provide, mimicking the peace and quiet we find at home. Find your Zen, focus, unwind and recreate the familiar with Second Home.






OWL
MAY
SPA

Interdeco™

Rigid Click SPC Flooring

Discover a single flooring solution that delivers enduring beauty from bold and dramatic public spaces to the quietest hospitality guest rooms ever created. Mohawk Group's Rigid Click Flooring provides elegant design and performance solutions for public and private spaces.

LAYERS OF UNPARALLELED PERFORMANCE

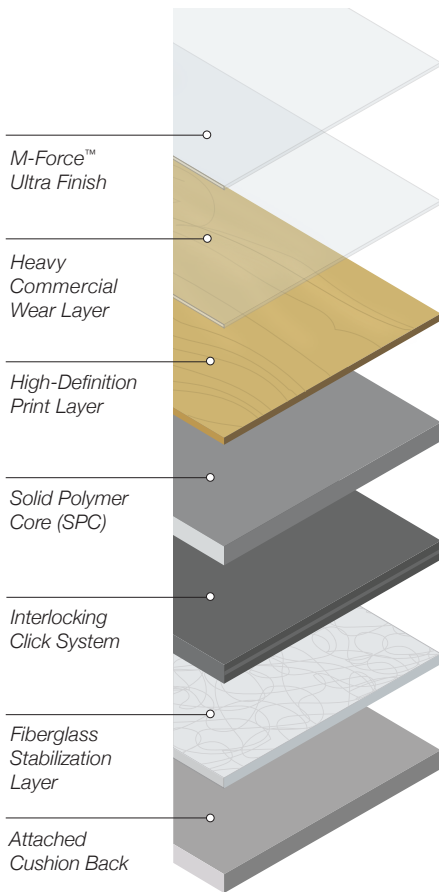

ACOUSTICS

Rigid Click Flooring delivers industry-leading IIC and STC ratings for best-in-class acoustic performance to create quiet spaces.



PERFORMANCE

Rigid Click Flooring features an innovative layered defense shield providing exceptional scratch, puncture and stain resistance for lasting beauty.



100% WATERPROOF

Rigid Click Flooring's Solid Polymer Core (SPC) is 100% waterproof, making it ideal for wet areas and guest baths. Our core does not expand or contract – even when moisture is present – ensuring immediate occupancy no matter the climate.



ATTACHED BACKING

Rigid Click Flooring's fiberglass stabilization layer and cushion backing minimize movement of the product while providing a superb moisture and sound barrier.



MADE IN USA

Rigid Click Flooring is made right here in our US resilient facility, offering a product that is quick and easy to access and one you can be proud to specify.



EASY TO CLEAN

M-Force™ Ultra finish provides greater stain and soil protection, offering a flooring solution that is easy to clean and maintain.

ADDITIONAL FEATURES

- Overall thickness at 6 mm with attached cushion
- No adhesive or underlayment required
- Immediate occupancy
- FloorScore® Certified



925 Getaway Gray, 941 Elevator Gray



 Interdeco™





Interdeco™



Area Rug Program

Mohawk Group believes in empowering architects and designers with the tools to achieve their vision. With the Area Rug Program, we expand the palette by merging the design of broadloom with the scale and versatility of area rugs. Simply put, Mohawk Group's broadloom offerings may now be transformed into beautiful area rugs in a few simple steps.

MOHAWK GROUP AREA RUGS

- Anchor large workspaces and intimate seating areas with added warmth and luxury
- Unify small and unique spaces
- Provide a refined foundational layer for bright and complex accent notes
- Protect hard surfaces
- Reduce noise and create quiet, contemplative spaces

HOW TO ORDER

1. Select your area rug style and color
2. Determine the size for your rug (LxW)
The maximum rug size is 15' x 45'
3. Determine the serging colorways or binding types
4. Determine if a rug underlayment will be needed
5. Submit information along with ship-to details in one of three ways:
 - Contact your Mohawk Group Account Executive
 - Email custom_cs@mohawkind.com
 - Call 800.622.6228 ext. 45273

Mohawk Group Customer Service will contact you with the order confirmation including final cost.



Connecting Neurons 956 Calaratta



Second Home Wood Colorways



821 Bagel Beige



836 Balance Beige



837 Rideshare Beige



842 Backpack Brown



847 Coffee Line Tan




849 Sidewalk Gray




859 Café Taupe



865 Mocha Brown

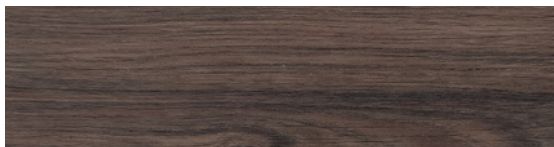


875 Taxi Queue Brown

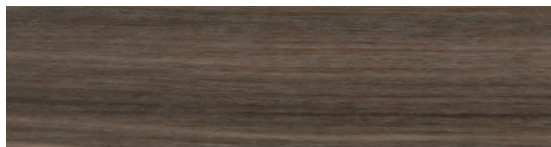

878 Wingtip Brown



885 Continental Breakfast Brown

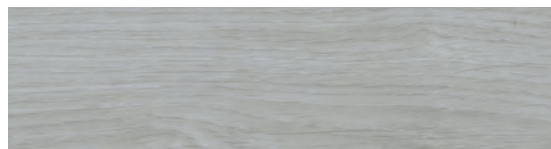

921 Ballroom Gray



925 Getaway Gray



941 Elevator Gray



948 Meeting Place Greige



Specifications

Second Home Collection Second Home Wood (C0141)

DESIGN

Product Type	Luxury Vinyl Tile - Rigid
Size	
Actual	7.56" x 47.80" (191.9 mm x 1214.00 mm)
Nominal	7.5" x 48"
Overall Thickness	6mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Edge Profile	Standard Bevel, Painted
Emboss	Overall
Colors Available	13
Packaging	7 pcs per carton / 30.03 lbs per carton / 50 cartons per palette

*For detailed warranty, adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Grade Rigid LVT
Core	SPC
Installation	Floating / Click
Classification	ASTM F1700 Class III; Type A – Smooth/Type B – Embossed
Squareness	ASTM F2421 - Passes - ± 0.010 " max
Size and Tolerance	ISO 24337 - Plank @ 48" - Passes - ± 0.08 "
Thickness, product	ASTM F387 - Passes - as specified ± 0.008 "
Thickness, wear layer	ASTM F410 - Passes - Commercial Min 0.02"
Dimensional Stability	ASTM F2199 - Passes - 0.2%/linear foot max
Curl	ASTM F2199 - Passes - 0.08" Max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 0.007"
Surface Integrity	ASTM F1914 - Passes - No Puncture
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change in surface dulling, attack, or staining
Resistance to Light	ASTM F1515 - Passes - $\Delta E < 8$, max
Resistance to Heat	ASTM F1514 - Passes - $\Delta E < 8$, max
Critical Radiant Flux	ASTM E648 - Class 1 (> 0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450
Acoustic	ASTM E90/E492 - 6" concrete slab with drop ceiling - IIC 68 - STC 62 ASTM E90/E492 - 8" concrete slab without drop ceiling - IIC 57 - STC 65

SUSTAINABILITY

Certification	FloorScore® Certified
---------------	-----------------------




Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
800.554.6637
mohawkgroup.com

C0141 12 PG BROCHR LT


Second Home Wood

Collection	Second Home
Style Name	Second Home Wood
Style Number	C0141
Product Type	LVT
Size	7.5 in x 48 in

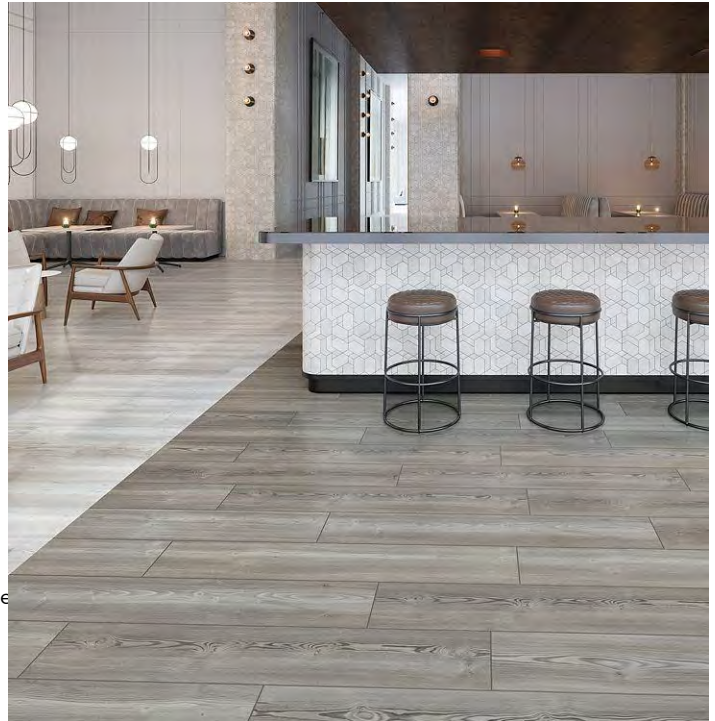

Feature	Description
Overall Thickness	6 mm
Wear Layer	20 mil
Finish	M-Force Ultra
Surface Profile	Overall Emboss
Squareness	ASTM F 2421 - Passes - ± 0.10 " max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	17.32
Pounds per Carton	31.85
Classification	ASTM F1700 - Class III, Type B - Embossed


Recommended Installation Methods




Monolithic



Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Bagel Beige

Color code: 821
Style number: C0141



Rideshare Beige

Color code: 837
Style number: C0141



Balanced Beige

Color code: 838
Style number: C0141



Backpack Brown

Color code: 842
Style number: C0141



Coffee Line Tan

Color code: 847
Style number: C0141



Sidewalk Gray

Color code: 849
Style number: C0141



Cafe Taupe

Color code: 859
Style number: C0141



Iced Mocha Brown

Color code: 865
Style number: C0141



Taxi Queue Brown

Color code: 875
Style number: C0141



Wingtip Brown

Color code: 878
Style number: C0141



Continental Breakfas

Color code: 885
Style number: C0141



Ballroom Gray

Color code: 921
Style number: C0141



Getaway Gray

Color code: 925
Style number: C0141



Elevator Gray

Color code: 941
Style number: C0141



Meeting Place Greige

Color code: 948
Style number: C0141



Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1000 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE <8
Resistance to Light	ASTM F1515 - Passes - ΔE <8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450

Sustainability

Feature	Description
Floor Score	Floor Score Certified
Certification Detail	Made from 100% post-industrial recycled materials in the US inside of a Zero-W
Country of Origin	USA
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.031 kg CO2e/ft2
Embodied Carbon	0.62 kg CO2e/ft2



Warranties

Limited 20 Year M-Force Ultra Commercial Warranty