


KEY FEATURES

- Better Together is perfect on its own or mixed with Mohawk Group carpet tile.
- Same thickness as carpet tile means no transitions are needed between ERT and carpet tile.
- Modular sizing with Mohawk Group carpet tiles and planks for unique and creative installations.
- When Better Together ERT and carpet tiles are installed together, use a single adhesive, Mohawk EnPress.





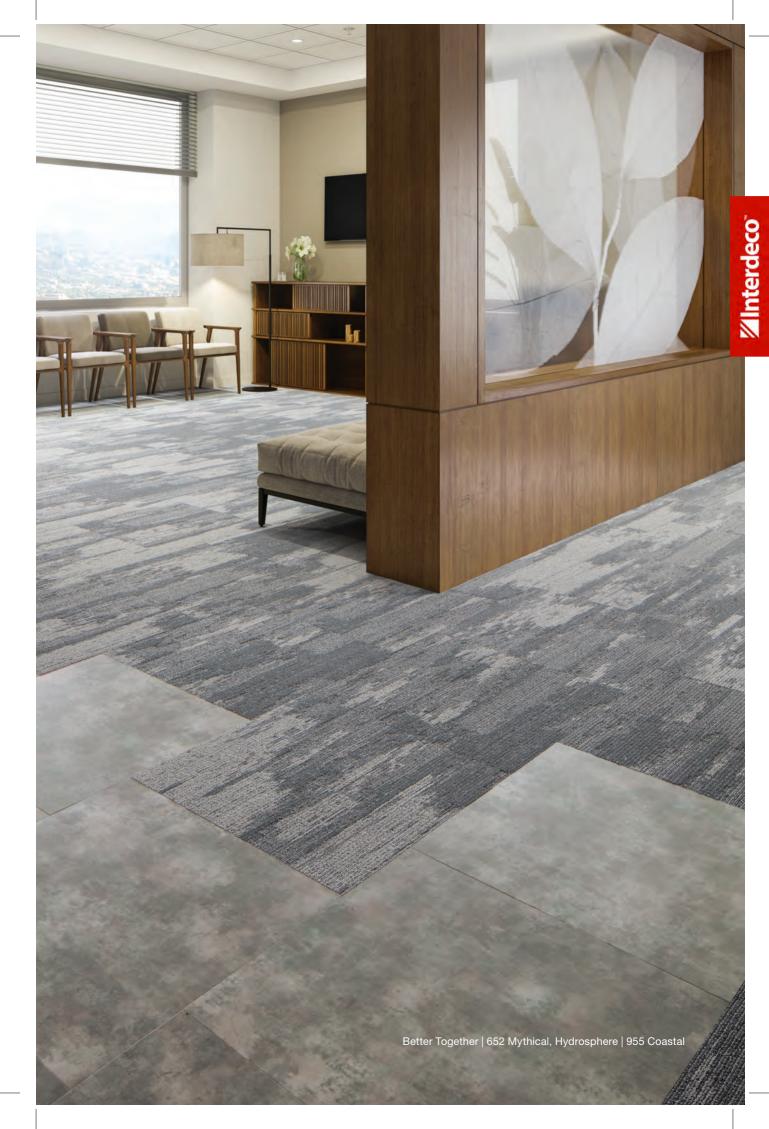







Better Together Features

- Variety of visuals provide multiple patterns and colors featuring wood, watercolor stone and concrete
- Range of modular sizes allow unique and creative installations 4"x36", 12"x36", 8"x48" and 24"x24" – all designed to work with Mohawk Group carpet tile
- 5mm thickness allows seamless flow from hard surface flooring to carpet without use of transitions
- Better Together glue down installation use MS160 Spray Adhesive, M95.0 Adhesive, or M700 PSA
- Better Together with Mohawk Carpet tile EnPress adhesive may be used for both products
- 20 mil wear layer for superior durability
- M-Force™ Ultra Enhanced Urethane Finish
- FloorScore® Certified
- Limited 10 Year Commercial Warranty

Glue Down ERT Construction

Better Together enhanced resilient tile features a 20 mil commercial wear layer with an M-Force™ Ultra Enhanced Urethane Finish that is polish-optional for versatile, cost-effective maintenance.

M-Force™ Ultra Enhanced Urethane Finish ——	
Heavy Commercial Wear Layer	
Decorative Print Layer ————————————————————————————————————	
Commercial Base ——————	
Stabilizing Backing Layer —————	_ If the second to the second

Better Together

Colorways

Better Together enhanced resilient tile brings hard and soft surface flooring together in perfect harmony.

4" x 36"



12" x 36"



8" x 48"



24" x 24"



Specifications

Style Names Better Together
Style Number C0097

Brand Mohawk Group – Hard Surface Product Type Enhanced Resilient Tile



DESIGN

Overall Gauge 5mm (.20") Wear Layer 20 mil (0.5mm)

Finish M-Force™ Ultra Enhanced Urethane Finish

Texture Ye

Sizes / Colors Available

4" x 36" - 2 Colors 8" x 48" - 4 Colors 12" x 36" - 6 Colors 24" x 24" - 4 Colors

Packaging

 4" x 36"
 16 sf/ctn; 16 pcs/ctn; 29 lbs/ctn

 8" x 48"
 16 sf/ctn; 6 pcs/ctn; 29 lbs/ctn

 12" x 36"
 18 sf/ctn; 6 pcs/ctn; 33 lbs/ctn

 24" x 24"
 16 sf/ctn; 4 pcs/ctn; 29 lbs/ctn

Installation Glue Down

Required Adhesive MS160 Spray Adhesive, M95.0 Resilient Flooring Adhesive, M700 Pressure Sensitive Adhesive
Alternate Adhesive Mohawk EnPress Adhesive (single adhesive may be used for Better Together and Mohawk Group

carpet tile when used in combined installation).



PERFORMANCE

Construction Commercial Grade Enhanced Resilient Tile

Classification ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed

SquarenessASTM F2421 - Passes - ±0.10" maxSize and ToleranceASTM F2421 - Passes - ±0.16"/linear footThicknessASTM F386 - Passes - as specified ±0.005"

Flexibility ASTM F137 - Passes - 1" mandrel

Dimensional Stability ASTM F2199 - Passes - 0.020"/linear foot max Static Load Limit ASTM F970 - Passes, modified at 1500 psi

Residual Indentation ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%

Slip Resistance ASTM C1028 - Passes - Wet: ≥ 0.5

Resistance to Chemicals ASTM F925 - Passes - No more than a slight change

 $\begin{tabular}{lll} Resistance to Light & ASTM F1515 - Passes - $\Delta E < 8$ \\ Resistance to Heat & ASTM F1514 - Passes - $\Delta E < 8$ \\ Critical Radiant Flux & ASTM E648 - Class 1 (>0.45 W/cm²) \\ Smoke Density & ASTM E662 Part A - Less than 450 \\ \end{tabular}$



SUSTAINABILITY

Certification FloorScore® Certified



SERVICE

Warranty

Limited 10 Year Commercial Warranty

Mohawk Group

Better Together

Style Name **Better Together**

C0097 Style Number LVT Product Type 12" X 36" Size

Feature	Description
Overall Thickness	5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force Ultra
Surface Profile	Overall Emboss
Squareness	ASTM F2421 - Passes - ±0.10" max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	18
Pounds per Carton	33
Classification	ASTM F1700 - Class III, Type B - Embos



Recommended Installation Methods











Monolithic


Monolithic Stepping

Half Lap

Random

Brick Ashlar

Herringbone











Mohawk Group

Colorways



Rockwood

241 Color code: C0097 Style number:

711

C0097



Imagine

Color code: 646 C0097 Style number:



Mythical

652 Color code: Style number: C0097



Spalding

Color code: 736 Style number: C0097



Bonafide

Color code: 766 Style number: C0097



Colonial

Color code:

Style number:

Linen

Color code: 876 Style number: C0097



Peristyle

Color code: 878 C0097 Style number:



Ancestral

Color code: 884 C0097 Style number:



Eclipse

Color code: 886 Style number: C0097



Blueblood

Color code: 915 C0097 Style number:



Quietude

Color code: 936 C0097 Style number:



Granita

Color code: 946 Style number: C0097



Fresco

955 Color code: Style number: C0097



Twilight

986 Color code: Style number: C0097



Argus

Color code: 989 Style number: C0097

Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1500 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - IIE < 8
Resistance to Light	ASTM F1515 - Passes - IE < 8
Critical Radiant Flux	ASTM E648 - Passes - 🛘 0.45 watts/cm², Class 1
Smoke Density	ASTM E662 Part A - Less than 450













Sustainability

Feature	Description
Floor Score	Floor Score Certified
Country of Origin	China
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO2e/ft2
Embodied Carbon	1.11 kg CO2e/ft2

Warranties

Limited 20 Year M-Force Ultra Commercial Warranty







