



Inspired by aerial photography of raw, natural environments, the Interstellar collection of carpet tile enables you to create subtle landscapes of tonal and textural shifts. Impressionist patterns in 24x24 and 12x36 tiles explore chromatic palettes highlighted with lustrous metallic yarns. With the biophilic design of Interstellar, you can bring the depths of the earth and farthest reaches of the atmosphere to your inspired spaces.



 Interdeco™









24BY24	□ Style Name / Number	Cosmos / MD342
	Construction	Tufted
	Surface Appearance.....	Textured Patterned Tip Shear
	Gauge	1/12" (47.00 rows per 10 cm)
	Tufted Weight.....	37 oz/yd ² (1255 g/m ²)
	Dye Method.....	Solution Dyed / Yarn Dyed
	Fiber Type	duracolor. Premium Nylon
	Stain Release Technology ...	Permanent, Built into the Fiber
	Soil Release Technology	Sentry Soil Protection
	GSA Stain Release Rating ...	Passes
	Backing Material.....	EcoFlex NXT
	Indoor Air Quality.....	Green Label Plus Certified # 1171
	NSF 140.....	Gold
	Size	24" x 24" (.6096 m x .6096 m)
	Installation Method.....	Monolithic / Vertical Ashlar / Brick Ashlar / Quarter Turn / Multi Directional
	Flammability.....	ASTM E 648 Class 1 (Glue Down)
	Smoke Density.....	ASTM E 662 Less than 450
	Static Propensity	AATCC - 134 Under 3.5 KV
	Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static	


12BY36	□ Style Name / Number	Galactic / MD343
	Construction	Tufted
	Surface Appearance.....	Textured Patterned Tip Shear
	Gauge	1/12" (47.00 rows per 10 cm)
	Tufted Weight.....	37 oz/yd ² (1255 g/m ²)
	Dye Method.....	Solution Dyed / Yarn Dyed
	Fiber Type	duracolor. Premium Nylon
	Stain Release Technology ...	Permanent, Built into the Fiber
	Stain Release Technology	Sentry Plus Stain Protection
	Soil Release Technology.....	Sentry Soil Protection
	GSA Stain Release Rating ...	Passes
	Backing Material.....	EcoFlex NXT
	Indoor Air Quality.....	Green Label Plus Certified # 1171
	NSF 140.....	Gold
	Size	12" x 36" (.3048 m x .9144 m)
	Installation Method.....	Monolithic / Half-Lap / Brick Ashlar / BasketWeave / Plank Half-Lap / Monolithic Stepping / Random / Herringbone
	Flammability.....	ASTM E 648 Class 1 (Glue Down)
	Smoke Density.....	ASTM E 662 Less than 450
	Static Propensity	AATCC - 134 Under 3.5 KV
	Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static	

24BY24	□ Style Name / Number	Groundmap / MD344
	Construction	Tufted
	Surface Appearance.....	Textured Patterned Tip Shear
	Gauge	1/12" (47.00 rows per 10 cm)
	Tufted Weight.....	34 oz/yd ² (1153 g/m ²)
	Dye Method.....	Solution Dyed / Yarn Dyed
	Fiber Type	duracolor. Premium Nylon
	Stain Release Technology ...	Permanent, Built into the Fiber
	Stain Release Technology	Sentry Plus Stain Protection
	Soil Release Technology.....	Sentry Soil Protection
	GSA Stain Release Rating ...	Passes
	Backing Material.....	EcoFlex NXT
	Indoor Air Quality.....	Green Label Plus Certified # 1171
	NSF 140.....	Gold
	Size	24" x 24" (.6096 m x .6096 m)
	Installation Method.....	Monolithic / Vertical Ashlar / Brick Ashlar / Quarter Turn / Multi Directional
	Flammability.....	ASTM E 648 Class 1 (Glue Down)
	Smoke Density.....	ASTM E 662 Less than 450
	Static Propensity	AATCC - 134 Under 3.5 KV
	Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static	



For LVT spec information, visit our website at www.mohawkgroup.com

Installation Instructions:

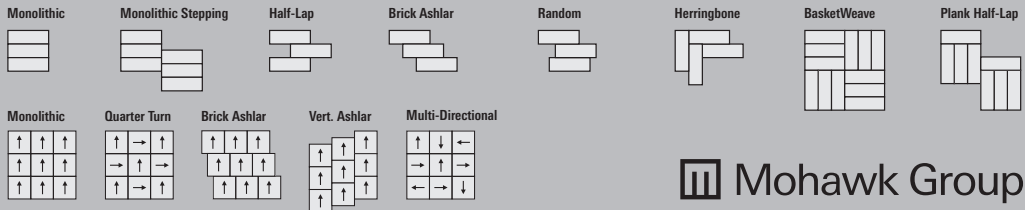

Mohawk Group

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Duracolor by Mohawk Stain Resistant System passes GSA requirements for permanent stain resistance. Under GSA requirements stain resistant carpets must score no less than 8.0 (10.0 is best) on the AATCC Red 40 Stain Scale. Carpet samples must first be exposed to 100 revolutions of the Taber abrader (1,000-gram weight per H-18 wheel) and then the abraded area must be stain tested using AATCC tested using AATCC test method 175.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com

