



Terrain II

Terrain II

Bring the rustic beauty of the outdoors in with the *Terrain II* collection. *Terrain II* features oak, walnut, and other authentic wood visuals with 20 colorways. Styles are available in a range of wear layers, thicknesses, and constructions, to fit a variety of commercial spaces. All constructions of *Terrain II*

have our highly durable **ExoGuard+™ finish** which provides superior scratch resistance resulting in enhanced appearance retention and abrasion resistance. Polish-optional ExoGuard+™ provides durability and ease of maintenance in demanding environments.



COVER PAGE: TERRAIN II (LVT 0892V) IN THATCH (00173) | INSTALLED BRICK
ABOVE: TERRAIN II (LVT 0892V) IN ROOT (00568) | INSTALLED HERRINGBONE



Terrain II 4.0 and 5.0 mm constructions are designed for use in high traffic public spaces to **seamlessly install with carpet tile** without the need of transition strips, while reducing sound transmission.

ABOVE: TERRAIN II (RIGID CORE 4125V) IN ECHO (00775) | INSTALLED STAGGER AND BEYOND (AREA RUG G013R) IN DUNE (15105)





Manufactured without ortho-phthalates, *Terrain II* is **Floorscore® certified for low VOCs**. All LVT constructions have pre-consumer recycled content, from both internal waste streams and qualified sources of external waste, so we can greatly reduce the amount of waste going to landfill.

Made in the United States with shorter lead times and no tariffs. All variations of *Terrain II* are available as **Quick Ship** so you can order material when you need it up to 25,000 square feet and it will ship within two weeks or less.

TERRAIN II (LVT 0892V) IN TIMBER (00572) | INSTALLED STAGGER


Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. V1 products have little or no variation in shade and / or texture, while V4 have the greatest variation from piece to piece. Images represent shade variations only. Samples should be used to assess color.

V1		V2		V3		V4	
	Uniform Appearance		Slight Variation		Moderate Variation		Substantial Variation
V3	Summit 05012	V3	Ash 00174	V2	Timber 00572	V2	Shade 00564
V2	Orchard 05013	V3	Root 00568	V3	Willow 00170	V3	Sumac 07004
V2	Echo 00775	V3	Grove 00769	V4	Alder 07005	V2	Nest 00774
V2	Thatch 00173	V2	Trail 00256	V2	Birch 00684	V2	Sequoia 07003
V3	Lark 05016	V2	Lodge 00740	V3	Thicket 07008	V3	Aspen 05019


Terrain II

Rigid Core Construction

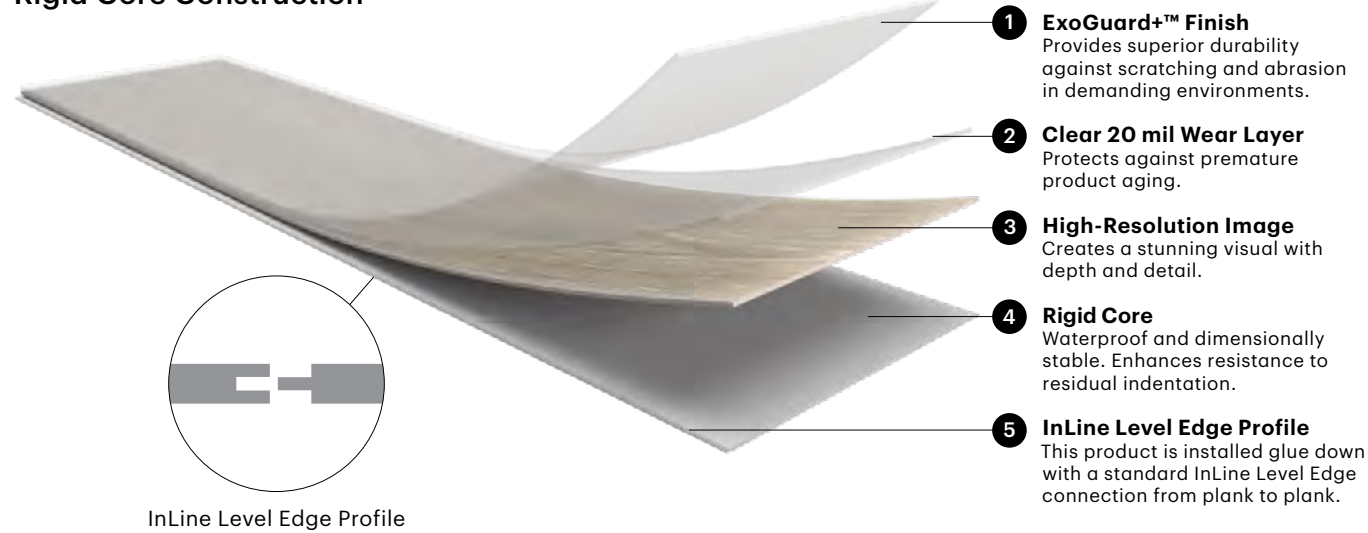

InLine Level Edge Profile


LVT Construction

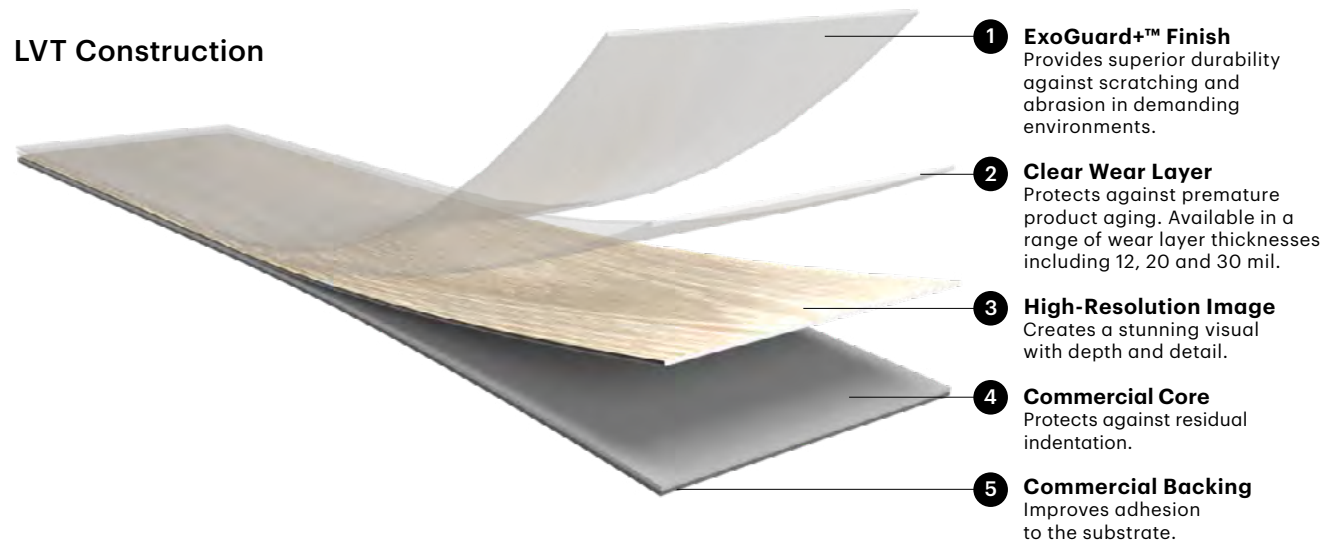

Recommended Applications


LVT 0454V 20 mil 2.5 mm | LVT 0892V 30 mil 3.0 mm
LVT 4110V 20 mil 5.0 mm | Rigid Core 4125V 20 mil 4.0 mm

Ideal for Heavy Commercial Environments
Education | Government | Healthcare | Hospitality
Multi-family | Retail | Senior Living | Workplace

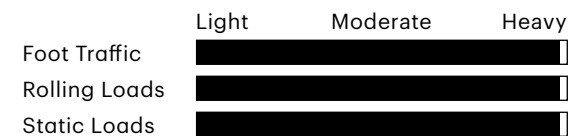

LVT 0453V 12 mil 2.5 mm

Ideal for Light Commercial Environments
Light Retail | Multi-family | Senior Living

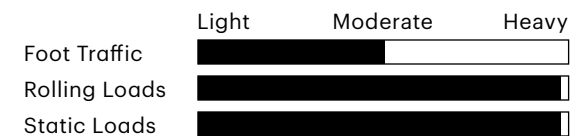

Attributes

	LVT 0453V 12 mil—2.5 mm	LVT 0454V 20 mil—2.5 mm	LVT 4110V 20 mil—5.0 mm	LVT 0892V 30 mil—3.0 mm	Rigid Core 4125V 20 mil—4.0 mm
Superior Durability (ExoGuard+™) ExoGuard+™ advanced topical finish technology delivers the highest performance scratch resistance and resists UV light degradation, hand sanitizers, disinfectants and common stains.	×	×	×	×	×
Made in the USA Manufactured in the United States.	×	×	×	×	×
Polish-Optional Reduces Cost Polish-optional finish that can reduce the cost of annual maintenance.	×	×	×	×	×
No Transitions Needed The 5 mm thick LVT and 4 mm thick Rigid Core profiles work alongside most carpet tile for smooth transitions throughout your space with no need for a transition strip.			×		×
Performs with Static and Rolling Loads The high PSI tolerance of the product enhances resistance to indentation in areas with heavy static and rolling loads per ASTM test methods.	×	×	×	×	×
Faster Installation Reduces Cost The rigid core allows installation over existing hard surfaces with little or no floor prep, by hiding subfloor imperfections, without telegraphing, with no acclimation time needed.					×
Quick Ship As a quick ship product you can order material when you need it up to 25,000 square feet and it will ship within two weeks or less.	×	×	×	×	×
Reduces Sound Transmission An attached cork underlayment provides added sound dampening from floor-to-floor sound transfer.			×		×
Waterproof 100% waterproof this product can be installed in areas with topical moisture such as lobbies, reception areas, resident kitchens and bathrooms.					×
FloorScore® IAQ Certified This product is third party certified for low VOC emissions, contributing to valuable IEQ points for LEEDv4 credits.	×	×	×	×	×
LEEDv4 Contributions IEQ – FloorScore® IAQ Certification MR – RFCI Industry Average EPD	×	×	×	×	×
Non Ortho-Phthalate Construction Formulated without ortho-phthalates.	×	×	×	×	×



This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on shawcontract.com. Specifications are subject to nominal manufacturing variances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.

ShawContract®