



Printed on 50% post consumer waste (PCW) fiber manufactured using wind power.

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

#### www.interface.com

## **United States Headquarters**

1280 West Peachtree Street NW Atlanta, GA 30309 1.800.634.6032

#### **Canadian Headquarters**

233 Lahr Drive Belleville, ON K8N 5S2 1.800.267.2149 ext.52128

### **Brazilian Headquarters**

Rua Surubim, 577 - Conjuntos 73/74 7° Andar 04571-050 - São Paulo - SP + 55 11 2196 0900

## **Latin American Headquarters**

Montes Urales # 415 Piso 6 Col. Lomas de Chapultepec Mexico City, CDMX, C.P. 11000

- + 52 55 5520 0195,
- + 52 55 2791 6812

CIM# IFS00880 10/2020





Climate change is undeniable. And reversible. Our mission is to prove it. Join the #ClimateTakeBack and help create a climate fit for life.



Who doesn't love a bold choice? With Studio Set LVT, we encourage you to embrace a saturated spectrum of daring brights and warm neutrals—and take note of the subtle woodgrain pattern that suggests texture without demanding attention. Go beyond conventional solutions to create inspiring spaces with pure color and unique composition. Choose Studio Set.

Studio Set LVT is fully recyclable through our **ReEntry™** program and contains a significant percentage of recycled content. As part of Interface's commitment to Climate Take Back™, all of the products we sell are carbon neutral across their full life cycle. **Carbon Neutral Floors™** 

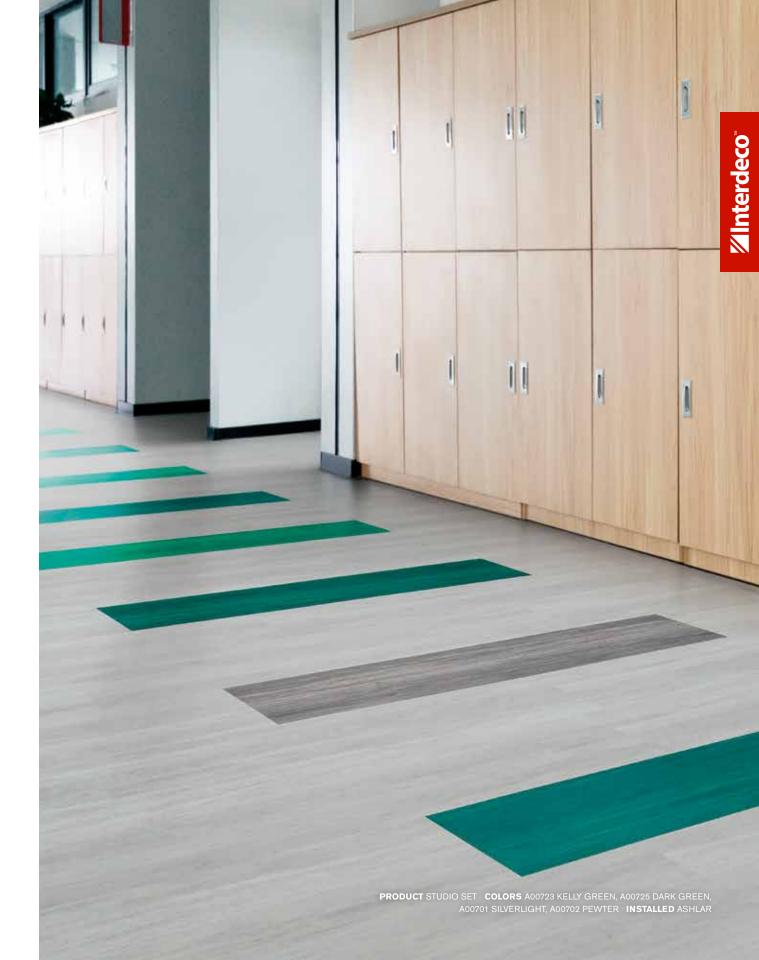

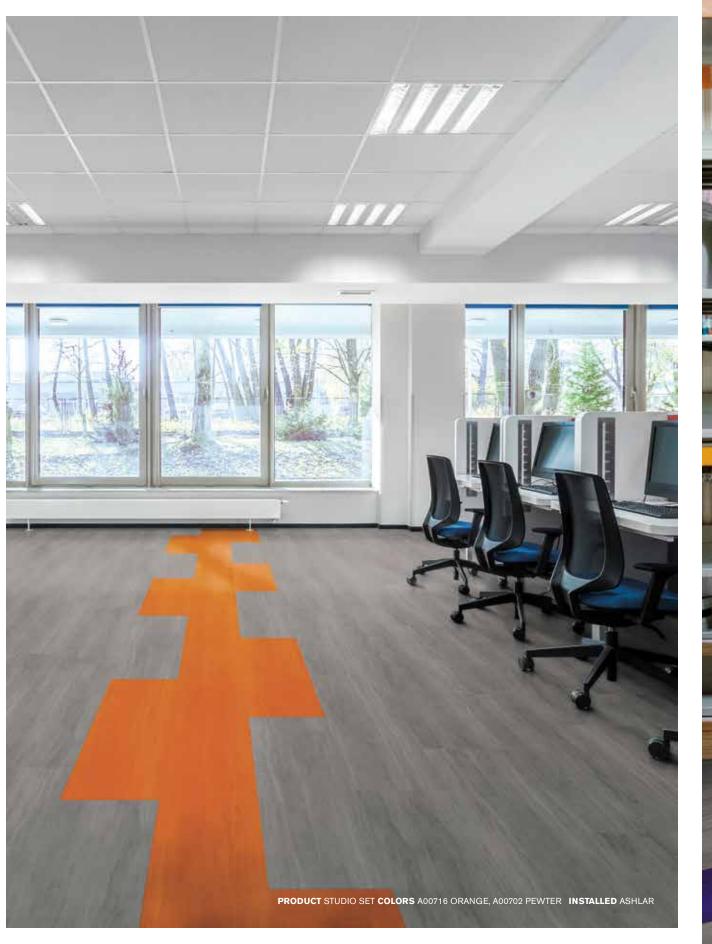



# **Interdeco**

## Specifications

Product Number

Product Construction High Performance Luxury Vinyl Tile Class / ASTM F1700 Class III Printed Vinyl Plank

Wear Layer Thickness 22 mil Total Thickness 4.5 mm

Backing Class

Commercial Grade
Ceramor<sup>™</sup> Coating
25 cm x 1 m (9.845 in x 39.38 in) Finish Nominal Dimensions GREENGUARD Gold

Indoor Air Quality FloorScore® Certified CDPH 01350 Compliant Carbon Offsets Carbon Neutral Floors™

NSF/ANSI 332 Silver Environmental Certifications Contributes to IEQ: Low Emitting Materials; LEED v4

M&R: EPD and EPR Fully Recyclable into Carpet Tile Backing End of Life

through ReEntry®

Installation Methods Ashlar, Herringbone

## Now with Recycled Content.

View the full product specification on interface.com for details.



## Studio Set™ Vol. 2 Colorline



A00714 YELLOW



A00715 CHARTREUSE



A00716 ORANGE



A00717 RED



A00718 DEEP FUCHSIA



A00719 VIOLET



A00720 ROYAL BLUE



A00721 ELECTRIC BLUE

A00723 KELLY GREEN



A00706 MUSHROOM



A00701 SILVERLIGHT



A00702 PEWTER

A00713 SLATE





A00725 DARK GREEN



A00726 PEBBLE



A00727 SAND

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see our full LVT product disclaimer at interface.com.

Why Our Modular Resilient Sound Choice<sup>™</sup> LVT?

# Integrated System.

Say goodbye to transition strips and doubling up. Our Sound Choice LVT is made to work as a system with our modular carpet. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save money.

# Real Flexibility.

Create a unique look that lasts. Interface modular resilient LVT extends the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

# Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into new recycled content carpet backing through our ReEntry<sup>™</sup> program.

## Noise Reduction.

Silence distractions. Interface is helping create +Positive spaces™ with our LVT with Sound Choice backing. Sound Choice is a specially formulated backing developed for superior noise reduction, offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.



# High Performance from Top to Bottom.

- **1.** Ceramor<sup>™</sup> Coating. Minimizes everyday scratching and scuffing.
- **2.** Wear Layer. High quality layer enabling 15 years of resilience and performance.
- **3.** *Print Film.* Provides outstanding visuals of natural materials and Interface innovative designs.
- **4.** Core Sheet. Creates a thickness for a stronger core and reduces telegraphing from beneath.
- **5.** Fiberglass. Adds dimensional stability and controlled flexibility.
- **6.** Core Sheet. Creates a thickness for a stronger core and reduces telegraphing from beneath.
- **7.** Sound Choice™ Backing. Provides comfort and superior acoustic performance.

# Third Party Certifications.

Carbon Neutral Floors. The flooring products that we sell - carpet tile, LVT, and nora rubber sheets and tiles - are carbon neutral across their full product life cycle. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

Environmental Product Declaration (EPD). Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

Sustainable Assessment. Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire life cycle.

Indoor Air Quality. All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is GREENGUARD Gold and FloorScore® Certified and CDPH 01350 compliant, assuring very low emissions of VOCs.











