



AmericanBiltrite
Flooring



AB PURE RUBBER TILE & SHEET



Interdeco™

ABPURE

Rubber flooring formulation that avoids color fading.

- ABPURE is a revolutionary patented formulation with far superior colorfastness, meaning **colors will not fade under light compared with traditional rubber formulas.**
- ABPURE is the **only rubber flooring product that passes the ASTM F 1515** (American Society for Testing and Materials).

Who is American Biltrite?

- In business for over 100 years.
- Producing rubber flooring since 1943.
- Manufactures the products in North America.
- Is one of the largest manufacturers of specialty commercial flooring in Canada.



ENGINEERED TO PERFORM

- 10% pre-consumer recycled content.
- PVC/Chlorine Free and FloorScore® certified for indoor air quality.
- Treated to resist the growth of fungus and mold.
- Meets ADA requirement for slip resistance.
- Superior comfort underfoot.
- Custom logo and floor design capabilities.
- Easy to install due to the high flexibility of the product: will not whiten, crack or break.
- Easy to maintain.
- Low lifecycle cost.



Complete your design with accessories in the same AB PURE colors* as your floors.

* Solid colors only (no chips).

STAIR TREADS

Molded Stair Treads combine easy installation, maximum resiliency and sound absorption that is ideal for stairwell projects. Regular and one piece versions are available in 36, 48 and 72". For areas requiring extra slip resistance, visually impaired configurations are also available.

Treads: regular and one-piece round for general applications and with visually impaired safety strip

Gauge	3.17 mm	1/8"
Sizes	0.914 m	36"
	1.219 m	48"
	1.828 m	72"
Depth / Regular	314.33 mm	12-3/8"
Depth / One-Piece	482.6 mm	19"
Nosing Depth	47.63 mm	1-7/8" ADA Compliant
Nosing Radius	6 mm	1/4" ADA Compliant

HEAT WELD / COLD WELD


Optional heat welding or cold welding seamless, sanitary flooring that's easy to maintain. Heat welding is available in all 36 AB PURE colors by ordering with code ABW followed by color number in the floor color chart.

Cold weld is only available in transparent.

PRO-TECH COVE

Create a long-lasting, puncture resistant sanitary barrier, impervious to moisture, dirt, bacterial and fungal contamination when heat or cold welded. AB PURE flooring is color matched and factory bonded to the aluminum construction in convenient coves to a maximum 12" up / 12" out and 10' lengths.

Available in 36 Colors




ABS-34
Glaciar




ABS-38
Steel




ABS-23 ◆
Anthracite




ABS-94
Forget-me-not




ABS-95
Electric blue




ABS-68
Rich lavender



ABS-31
Gainsboro Valley




ABS-33
Pebble beach




ABS-37
Battleship Gray




ABS-90
Baby blue



ABS-92
Aquamarine




ABS-98 ◆
Blue Lagoon




ABS-41
Linen




ABS-30
Sand castle




ABS-32
Appalachian trail



ABS-83
Pistachio




ABS-85
Olive green




ABS-87
Tundra




ABS-15
Snowstorm




ABS-35
Ash gray




ABS-20
Starry night



ABS-45
Wheat



ABS-36 ◆
Tan




ABS-39 ◆
Camouflage Green

Clarity and Longevity of Color. Guaranteed.


CUSTOM COLORS AVAILABLE. For special projects, custom colors can be created that perfectly match your design needs. Minimum order required.



ABS-73
Banana candy




ABS-74
Buff



ABS-72
Limoncello




ABS-75
Orangerine



ABS-52
Terracotta



ABS-51
Capuchin




ABS-53
Land of Fire




ABS-55
Fire engine red




ABS-66
Doll house



ABS-57
Chestnut



ABS-58
Espresso



ABS-56
Shiraz

For sizes and thicknesses see specifications on back cover
For more detailed information, please refer to website.

Profiles available


To order our product in the texture and color combination of your choice make sure to specify the **texture code as well as color code** Ex: ABS-66 for Imagine in Doll House color.

SLATE



ABF

HAMMERED

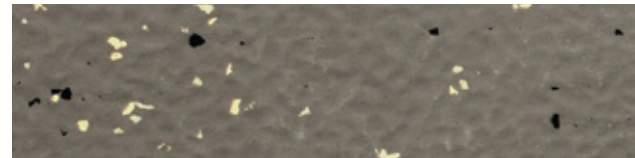

ABM


ROUND



ABR


Round profile available in base colors only (no chips)

IMAGINE (smooth paper finish)

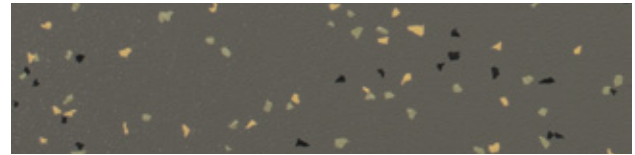

**ABS/
ABT**

NATURAL SLATE (no chips)

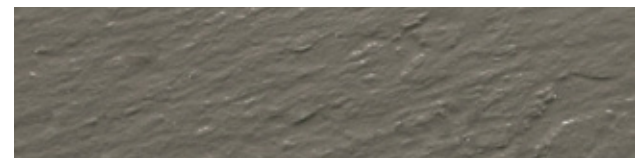

ABA

Natural Slate colors available are marked by ◆

Other profiles available on minimum order basis. Please refer to website for more information.



TECHNICAL SPECIFICATIONS

Gauge	Tile	ABA, ABR, ABF, ABM, ABT ABT	3 mm 2 mm / 3 mm	0.118" 0.080" / 0.118"
Sizes	Tile	ABR, ABT ABR, ABT ABA, ABF, ABM ABA, ABF, ABM	900 mm x 900 mm 450 mm x 450 mm 905 mm x 905 mm 452 mm x 452 mm	35 1/2" X 35 1/2" 17 11/16" X 17 11/16" 35 11/16" X 35 11/16" 17 13/16" X 17 13/16"
Gauge	Sheet	ABS	2 mm / 3 mm	0.080" / 0.118"
Sizes	Sheet	ABS	1,5 m x 15,2 m	60" nominal x 50'

Composition	Homogeneous	
ASTM D 3389	Abrasion Resistance (H-18,500 g @ 1,000 cycles) (TILES)	Pass
ASTM E 648	Critical Radiant Flux CRF (W/cm ²)	> 0.45
ASTM E 662	Smoke Density	≤ 450
ASTM E 989 / E 492	Sound Absorption (with a suspended ceiling)	IIC 59
ASTM F 925	Chemical Resistance	Exceeds standards
ASTM F 970	Static Load (modified at 1,000 psi for tile / 2,000 psi for sheet)	≤ 0.005"
ASTM F 1514	Heat Stability	ΔE ≤ 8
ASTM F 1515	Light Stability	ΔE ≤ 8
ASTM F 1344	Standard specification for rubber tile	Class 1, A or B
ASTM F 1859	Standard specification for rubber sheet	Type 1
ASTM G 21	Antimicrobial/Antifungal Resistance Test	Pass (28 days)
Indoor Air Quality (IAQ)	Volatile Organic Compounds (VOC's)	FloorScore Certified by SCS Certification Registration Number SCS-FS-01492
Adhesive	AD-777	Regular traffic
	AD-535	Heavy rolling traffic, under patients' beds, non-acclimatized entrance zones
Limited Wear Warranty	10 years	
Resistance to oils and greases	ABPURE® is not recommended for environments where it could be exposed to oils and greases, whether mineral, animal or vegetable.	
Antimicrobial/Antifungal	IMPORTANT: All ABPURE® rubber flooring contains inhibitors that gives this flooring antimicrobial and antifungal properties.	

Please note that technical website documents prevail.

INSTALLATION

Optimal results can only be achieved by following manufacturer's instructions closely. Only adhesives approved by American Biltrite specifically for AB PURE should be used for gluing. Detailed installation instructions can be found at american-biltrite.com and should be carefully followed.



American Biltrite 200 Bank Street, Sherbrooke,
Quebec J1H 4K3 Canada | american-biltrite.com
To order samples: flooring@american-biltrite.com
1.800.437.8743 | Technical Services: 1.800.479.0

® ABPURE is a registered trademark of American Biltrite

PRINTED IN CANADA BRO-E6-PUR ISSUED 12/2016

