

Level Set Collection | LVT  
Natural Woodgrains



## Level Set™ Collection | Natural Woodgrains

---

With thoughtful consideration for design, performance and a sustainable path, we've crafted a foundational collection of luxury vinyl tiles that fit perfectly into the Interface flooring systems.

Level Set Natural Woodgrains is a selection of 25cm x 1m Skinny Planks™ in classic wood looks and a smooth finish. Natural Woodgrains is offered in a range of earthy neutrals from light to dark.

It's not only a perfect match to our Skinny Planks and square carpet tiles, it is also a perfect fit in terms of thickness. This means you can easily install our resilient and soft flooring to create an integrated floor or inset rug, and move effortlessly from surface to surface without transition strips.

We design all our products with the ability to feed ReEntry®, our reclamation program. And, of course, like all of our products made around the world, the Level Set Collection is carbon neutral—just some of the many steps we take toward creating a climate fit for life. Join the **#ClimateTakeBack** movement.



























LVT PRODUCT NATURAL WOODGRAINS COLOR A00204 BEECH INSTALLED HERRINGBONE  
CARPET PRODUCT WORLD WOVEN | WW895 COLOR 105375 HEATHER WEAVE INSTALLED ASHLAR



## Specifications

Product Number	A002
Product Construction	High Performance Luxury Vinyl Tile
Class / ASTM F1700	Class III Printed Vinyl Plank
Wear Layer Thickness	22 mil
Total Thickness	4.5 mm
Backing Class	Commercial Grade
Finish	Ceramor™ Coating
Nominal Dimensions	25cm x 1m (9.845 in x 39.38 in)

### Performance

IIC Sound Rating	(ASTM E492-09) 57 IIC
Slip Resistance	(ASTM D2047) >0.55 wet/dry, ADA Compliant
Static Load Limit	(ASTM F970) 1500 psi
Flexibility	(ASTM F137) Passes
Resistance to Heat	(ASTM F1514) Passes
Resistance to Light	(ASTM F1515) Passes
Radiant Flux	(ASTM E648) Class I
Smoke Density	(ASTM E662) Passes, ≤ 450
Size & Squareness	(ASTM F2055) Passes, +/- 0.016 in. per linear foot
Thickness	(ASTM F386) Passes
Dimensional Stability	(ASTM F2199) Passes
Residual Indentation	(ASTM F1914) Passes
Resistance to Chemicals	(ASTM F925) Passes

### Environmental

Indoor Air Quality	FloorScore®/CDPH 01350 Certified for low-VOC emissions
Material Composition	Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers
Ingredients & Life Cycle Impacts	Environmental Product Declaration
Carbon Footprint	3rd Party Verified Carbon Neutral
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: <i>Low Emitting Materials</i> ; M&R: <i>EPD</i> and <i>EPR</i>
End of Life	Fully Recyclable LVT to Carpet Tile Backing

### Packaging

Square Feet per Carton	26.91 sq. ft. (2.5 m <sup>2</sup> )
Pieces per Carton	10
Weight per Carton	40 lbs (18 kg)
Cartons per Pallet	40
Pallets per Truckload	20

### Technical Information


Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry® - Call 1.888.733.6873 (U.S.) / 1.866.398.3191 (Canada)
Warranty	15 Year Limited Commercial Warranty
Installation Methods	Ashlar, Herringbone



## Natural Woodgrains Colorline



A00201 BLACK WALNUT

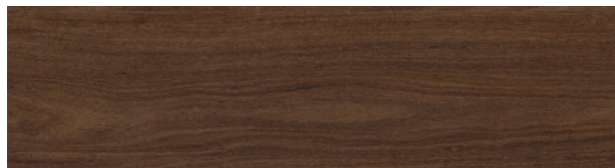


A00202 MADAGASCAR



A00203 CHESTNUT



A00204 BEECH

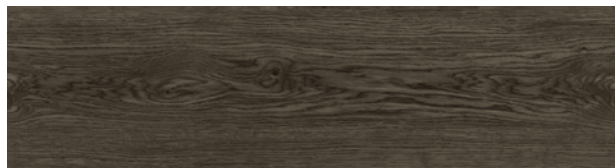

A00205 STORM



A00206 WINTER GREY

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see our full LVT product disclaimer @ [interface.com](mailto:interface.com).





A00207 WASHED WHEAT



A00214 BAMBOO



A00208 SAND DUNE



A00209 MAHOGANY



A00210 TEAK




A00211 WASHED MAPLE



A00212 CEDAR





Interface Modular Resilient LVT  
and Modular Carpet allow you to  
seamlessly move from hard to soft  
surfaces. No transition strip needed.



## Why Our Modular Resilient LVT?

---

### Integrated System.

*Say goodbye to transition strips and doubling up.* Our modular resilient floorings are made to work as a system with our modular carpet. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save money.

### Real Flexibility.

*Create a unique look that lasts.* Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

### Circular System.

*Keep flooring out of the landfill.* Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac®RE recycled content backing through our ReEntry® program.

### Noise Reduction.

*Silence distractions.* Interface is helping create +Positive spaces with our LVT with Sound Choice™ backing. It's Quiet Mark™ certified for its superior noise reduction qualities, offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.



## Why Our Modular Resilient LVT? (continued)



## High Performance from Top to Bottom.

- 1. Ceramor™ Coating.** Minimizes everyday scratching and scuffing.
- 2. Wear Layer.** High quality layer enabling 15 years of resilience and performance.
- 3. Print Film.** Provides outstanding visuals of natural materials and Interface innovative designs.
- 4. Core Sheet.** Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 5. Fiberglass.** Adds dimensional stability and controlled flexibility.
- 6. Core Sheet.** Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 7. Sound Choice™.** Provides comfort and superior acoustic performance.

## Third Party Certification.

**Carbon Neutral Floors.** All Interface flooring sold globally is third party verified carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

**Environmental Product Declaration (EPD).** Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

**Sustainable Assessment.** Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire lifecycle.

**Indoor Air Quality.** All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.









PLEASE RECYCLE

Printed on 50% post consumer waste (PCW) fiber manufactured using wind power.

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

[www.interface.com](http://www.interface.com)

#### United States Headquarters

1503 Orchard Hill Road  
LaGrange, GA 30240  
1.800.634.6032

#### Canadian Headquarters

233 Lahr Drive  
Belleville, ON K8N 5S2  
1.800.267.2149 ext.52128

#### Brazilian Headquarters

Rua Surubim, 577 - Conjuntos  
73/74 7º Andar  
04571-050 - São Paulo - SP  
+ 55 11 2196 0900

#### Latin American Headquarters

Montes Urales # 415 Piso 6  
Col. Lomas de Chapultepec  
México City, D.F. 11000  
Mexico  
+ 52 55 6395 5100

CIM # IFS00826 02/2019



Climate change is undeniable. And reversible. Our mission is to prove it.  
**Join the #ClimateTakeBack and help create a climate fit for life.**