



NOTES  
FDIT - 91

 Interdeco™

# Compound + Cast

ShawContract®



COVER : COMPOUND (LVT 4077V) IN BERYL (77429) AND CAST (LVT 4098V) IN SUSPEND (98510) | INSTALLED MONOLITHIC  
ABOVE: COMPOUND (LVT 4077V) IN FOUNDATION (77530) AND CAST (LVT 4098V) IN SUSPEND (98510) | INSTALLED MONOLITHIC

**Compound** was created to showcase subtle beauty marks that mimic the look of concrete, making each installation beautiful and unique.

**Cast** was born from curious play of aggregate materials, much like the appearance of age-old terrazzo. Through exploration of mixing and molding plaster, cement and resin, a resilient version of a classic material was born.

# Mix + Mingle

Resilient and carpet live harmoniously throughout commercial environments. Compound and Cast are offered in both 2.5 mm and 5 mm thicknesses that allow for versatility.

The 2.5mm thick profile works alongside a variety of existing resilient collections, ensuring you can transition visuals of similar thicknesses throughout your space.

The 5mm thick profile works alongside carpet tile for smooth transitions throughout your space with no need for a transition strip.





COMPOUND (LVT 4077V) IN ELEVATE (77518) | INSTALLED MONOLITHIC AND DREAM (CARPET TILE 5T265) IN PONDER (48530) | INSTALLED INSET ASHLAR



# Nice + Easy

COMPOUND (LVT 4077V) IN BASE (77504) | INSTALLED QUARTER TURN



Inspired by natural materials, each style and colorway creates a palette of neutrals and colors that work together throughout your environment. This collection's aesthetics are a soothing, unassuming fit, delivering a classic aesthetic with updated maintenance.

Compound + Cast have built in protection from wear within high traffic areas by pairing a 20 mil wear layer with ExoGuard+™ topcoat. No polishing requirements means a reduction in overall maintenance time and costs.



7.03




# Tried + True

Compound + Cast can be installed separately or together. Colors of Compound are combined within the aggregate visual of Cast, ensuring you have a palette of options within a single collection. This complementary collection can be used in a wide variety of environments.



COMPOUND (LVT 4077V) IN (BASE 77504) | INSTALLED QUARTER TURN



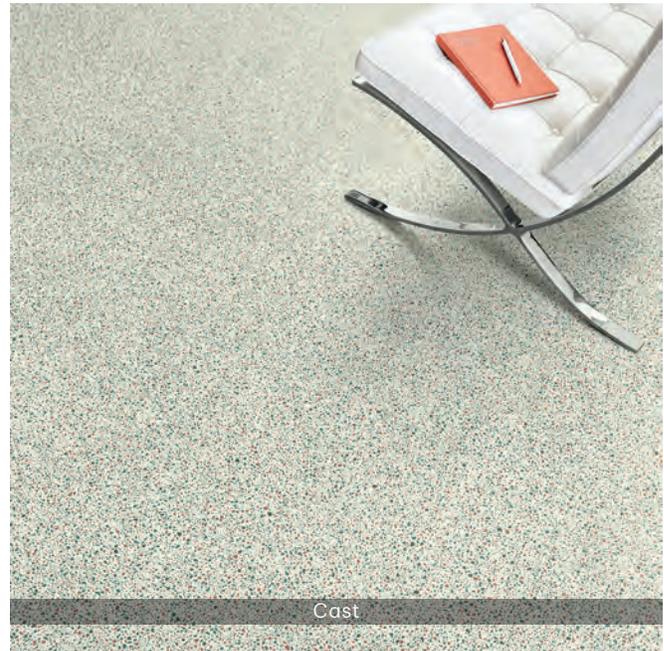

# Compound + Cast


**quick ship** Available up to 25,000 sqft within two weeks or less.

## Specifications


	Compound 2.5 mm		Compound 5.0 mm		Cast 2.5 mm		Cast 5.0 mm	
	US Units	Metric Units						
<b>Style Name</b>	Compound 2.5 mm		Compound 5.0 mm		Cast 2.5 mm		Cast 5.0 mm	
<b>Style Number</b>	4074V		4077V		4097V		4098V	
<b>Construction</b>	Commercial Luxury Vinyl Tile							
<b>Finish</b>	ExoGuard+™		ExoGuard+™		ExoGuard+™		ExoGuard+™	
<b>Class / ASTM F1700</b>	Class III, Type B							
<b>Installation</b>	Direct Glue		Direct Glue		Direct Glue		Direct Glue	
<b>Recommended Adhesive</b>	Shaw 4100, 4151 or S150							
<b>Nominal Dimensions</b>	24 in x 24 in	61 cm x 61 cm	24 in x 24 in	61 cm x 61 cm	24 in x 24 in	61 cm x 61 cm	24 in x 24 in	61 cm x 61 cm
<b>Wear Layer Thickness</b>	0.02 in	20 mil (0.5 mm)						
<b>Overall Thickness</b>	0.098 in	2.5 mm	0.197 in	5.0 mm	0.098 in	2.5 mm	0.197 in	5.0 mm
<b>Actual Width</b>	24 in	60.96 cm						
<b>Actual Length</b>	24 in	60.96 cm						
<b>Static Load</b>	(ASTM F970) Passes Modified 1000 PSI							
<b>Residual Indentation</b>	(ASTM F1914) Passes							
<b>Resistance to Heat</b>	(ASTM F1514) Passes							
<b>Resistance to Light</b>	(ASTM F1515) Passes							
<b>Resistance to Chemicals</b>	(ASTM F925) Passes							
<b>Radiant Panel</b>	(ASTM 648) Class 1							
<b>NBS Smoke</b>	(ASTM E662) <450							
<b>Warranty*</b>	15 Year Commercial Limited Underbed Warranty Available							

\*For detailed warranty information visit [shawcontract.com](http://shawcontract.com).

### Recommended Installation Methods



### Color and Visual Variation Index



Color and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colors.

This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on [shawcontract.com](http://shawcontract.com). Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.