



MineralFloor

ShawContract®



ORIGIN—was inspired by natural hardwoods offering a palette of core colors that provide consistency and design flexibility to meet a variety of specification needs.



Interdecó

Next Level Innovation

MineralFloor is an innovative hard surface collection with a **rock solid mineral core** that provides solutions to the high performance demands of the commercial spaces where we work, learn, heal and live. The rigid mineral core allows installation over existing hard surfaces with **minimal floor prep**, by hiding subfloor imperfections, without telegraphing, and installs right out of the box with no acclimation time needed.

This high-performing, **PVC-free** solution offers superior scratch, stain, water resistance, and improved resistance to indentation—so people can collaborate and roam carefree without the worry of harming the floor. Walk on and on and on.

COVER PAGE:
BASIS (RIGID MINERAL CORE 4339V)
IN ELABORATE (39504) | INSTALLED STAGGER

RIGHT:
ORIGIN (RIGID MINERAL CORE 4338V)
IN THEORY (38140) | INSTALLED STAGGER

Hybrid Innovation

Hard as a rock, *MineralFloor* was designed as a unique hybrid solution that falls between rigid resilient and porcelain tile and directly responds to the need to provide superior durability with ease of installation. Unlike porcelain products, *MineralFloor* addresses issues like ease of repairs and faster installation times. Featuring our **InLine Level Edge™** profile, *MineralFloor* installs 3X faster than porcelain tile with minimal floor prep, installed glue down with a level connection from plank to plank, and no grout required.

Key Benefits



Faster Installation Reduces Cost

- Minimal floor prep and downtime
- No acclimation required—backed by no acclimation warranty
- No grout required



Polish Optional

No finishing, waxing, buffing or stripping required, lowering the total cost of long-term ownership.



Waterproof

The rigid mineral core is 100% waterproof and can be installed in areas with topical moisture like bathrooms and kitchens—backed by top-down moisture warranty.



Reduces Sound Transmission

Rigid core construction provides added sound dampening from floor-to-floor sound transfer.



Reduced Waste

More tiles per box results in ease of shipping, storage, less waste, and reduced cost.



No Transition Needed

6 mm rigid core can be installed next to most carpet tiles without the need for transition strips.



Selectively Replace Tiles with Ease

Easy to remove for repairs.



BASIS—consists of two visuals that were inspired by quiet foundational stone and woven textures. Both creating a versatile canvas for designing any space.



Scratch + Indentation Resistant

MineralFloor is 3X as scratch resistant as a traditional LVT, providing superior durability that can stand up to the most demanding environments and offer value by extending the lifetime of your flooring.



Scratch Resistant

This product has been tested against the *Repetitive Traffic Scratch (RTS)* test and the *Deep Scratch* test, which replicates real world wear and tear. *MineralFloor*, on average, scored better than a traditional LVT.



Performs with Static and Rolling Loads

The high PSI of 2,500 pounds enhances resistance to indentation in areas with heavy static and rolling loads per ASTM test methods—backed by *indentation warranty*.

BASIS (RIGID MINERAL CORE 4339V)
IN ACTUALIZE (39535) | INSTALLED STAGGER

Stain Resistant

MineralFloor stands up to the demands of the toughest environments. It features improved resistance to stains including betadine, disinfectants and hand sanitizers, while also defending against hard-to-clean stains like hair dye and nail polish.

		MINERALFLOOR	COMPETITOR LVT	
COMMON STAIN TESTS	Hair Dye			Resilient planks were exposed to the staining agent for 24 hours followed by a cleaning and drying step.
	Nail Polish			
MEDICAL STAIN TESTS	Aniline Blue			Resilient planks were exposed to the staining agent for 1 hour followed by a cleaning and drying step.
	Betadine Skin Cleanser			
	Betadine Solution 10%			
	Iodine Tincture			
	Iodine Gram Stain			
	Potassium Permanganate			





Warranty Backed Performance

MineralFloor is backed by Shaw's 15-year commercial warranty, protecting against common pain points like **indentation, telegraphing** and **topical moisture**. A heavy performer, *MineralFloor* holds up to heavy traffic and demanding environments while providing a high-end look and transitioning smoothly to carpet.



15-Year Warranty*

Covers manufacturing defects, wear, top down moisture, no acclimation, indentations, and telegraphing.

*Non-prorated warranty providing full protection.

ORIGIN (RIGID MINERAL CORE 4338V) IN OVERTURE (38760)
INSTALLED STAGGER AND LANDING EDGE (CARPET TILE 5T375)
IN OPULENT SKY (71411) | INSTALLED BASKET WEAVE



At the heart of Shaw Contract we design products and solutions with our customers in mind. Everybody counts.

Sustainability is what unites us. It is our foundation and our purpose: our equal rights, our shared experience, our hopeful future. It is the air we breathe and the earth we stand upon.



PVC-Free

The core layer is made of a mineral composite and avoids the use of plastic polymers, making it PVC-free.



LEEDv4 Contribution

IEQ—FloorScore® IAQ Certification
Low VOC emissions



Ortho Phthalates-Free

Free of ortho phthalates and heavy metals.

ORIGIN (RIGID MINERAL CORE 4338V)
IN THEORY (38140) | INSTALLED STAGGER



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. V1 products have little or no variation in shade and / or texture, while V4 have the greatest variation from piece to piece. Images represent shade variations only. Samples should be used to assess color.



Origin (Rigid Mineral Core 4338V)



V2 Composition 38720 V2 Prelude 38710 V2 Theory 38140



V2 Overture 38760 V3 Inherent 38700 V2 Initiate 38130



V3 Distinct 38115


Basis (Rigid Mineral Core 4339V)



V2 Formation 39155 V2 Actualize 39535 V2 Configuration 39530



V2 Source 39595 V2 Intrinsic 39520 V2 Elaborate 39504

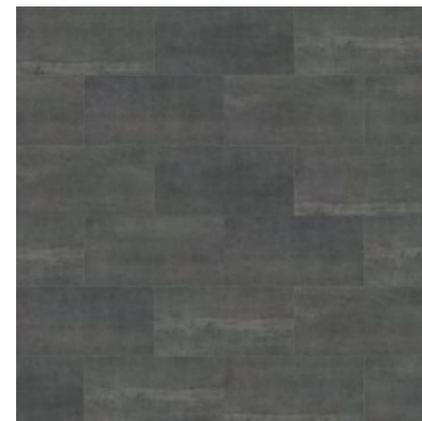

V2 Matrix 39585



This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on shawcontract.com. Specifications are subject to nominal manufacturing variances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.

ShawContract®