









Chantilly III | Broadloom Installation, color 536  
Custom Pattern, minimum of 500 sq./yds.



Figure Skate | Broadloom Installation, color 536  
Custom Pattern, minimum of 500 sq./yds.

Doodle Pad | Broadloom Installation, color 536  
Custom Pattern, minimum of 500 sq./yds.



Up and Over | Broadloom Installation, color 536  
Custom Pattern, minimum of 500 sq./yds.





Le Blanc III | Broadloom Installation, color 536  
Custom Pattern, minimum of 500 sq./yds.



Arc-Form | Broadloom Installation, color 536  
Custom Pattern, minimum of 500 sq./yds.




Shanty II | Broadloom Installation, color 536  
Custom Pattern, minimum of 500 sq./yds.

# Unibond Plus

For High Performance Environments

Primary Backing  
High Performance Thermoset Adhesive  
Reinforced Woven Synthetic

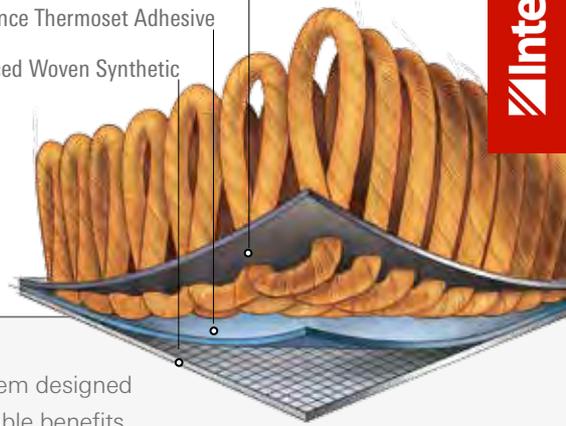

Interdeco™

Unibond® Plus is an advanced high performance backing system designed to provide long term carpet durability while delivering sustainable benefits. The Unibond Plus backing system utilizes a high performance thermoset adhesive designed to deliver greater dimensional stability and long term performance by encapsulating the carpet back stitch, and securing the secondary backing to the substrate. This advanced thermoset adhesive contains a minimum of 22% pre-consumer recycle content by total product weight. Unibond Plus is ideal for high performance environments.



## PERFORMANCE

- High performance backing designed for demanding commercial environments
- Greater dimensional stability - no growing or shrinking
- High tuft bind properties
- Eliminates edge ravel and zippering
- For use with direct glue or stretch in installations
- Limited Lifetime Warranty protects against tuft bind, edge ravel, zippering and delamination
- Excellent choice for demanding commercial environments



## BUDGET

- High performance backing offering meets most budget requirements



## SUSTAINABILITY

- Recyclable
- Contains a minimum 22% pre-consumer recycle content by total product weight
- May contribute to or comply with LEED credits MR 4.0, MR 5.0, IEQ 4.3 and innovation credit for NSF 140
- Certified Gold in accordance with NSF / ANSI 140
- Certified low VOC's under CRI Green Label Plus Program



## SERVICE

- Compliant with LEED EQ 4.1 low VOC emitting when installed with Mohawk Group recommended adhesive and seam sealer
- Products available through Quickship offering (up to 2,000 square yards within 10 business days)

*\*See Mohawk Group official warranty documents for further details at [www.mohawkgroup.com](http://www.mohawkgroup.com)  
LEED and the related logo is a trademark owned by the U.S. Green Building Council and is used with permission.*



# The Leader in Transparency and Red List Free Products

Durkan leads the building products industry in transparency with the largest selection of products with Declare Labels, Health Product Declarations (HPDs), and Environmental Product Declarations (EPDs). What's more, we offer over 490 Red List Free Declared products.

## OUR COMMITMENT

As a Gaia sponsor of the International Living Future Institute (ILFI), we are committed to revolutionary programs that are redefining the green building movement. These include the ILFI's Living Building Challenge and Declare programs.

Declare Labels are a 'nutrition label' for the building industry, providing ingredients, source and manufacturing locations. We offer you:

- The most products with Declare Labels
- The most Red List Free products

We have eliminated the mystery of product ingredients so you get total product transparency.\*

*Example of a Durkan Declare Label*



*Durkan utilizes multiple platforms for disclosing our transparency information, including: Designer Pages, Mindful Materials and the Declare Database."*

\* Transparency documentation can be found at [www.durkan.com](http://www.durkan.com)

BROADLOOM

|                                 |  |
|---------------------------------|--|
| Brand.....                      | <b>Durkan</b>                                  |
| Style Name / Number .....       | <b>Faceted Form 36 / MH340</b>                 |
| Construction.....               | Tufted   |
| Surface Appearance.....         | Textured Patterned Cut & Loop                  |
| Gauge .....                     | 1/12" (47.00 rows per 10 cm)                   |
| Tufted Weight.....              | 36 oz/yd <sup>2</sup> (1085 g/m <sup>2</sup> ) |
| Dye Method.....                 | Solution Dyed                                  |
| Fiber Type .....                | Colorstrand® SD Nylon                          |
| Stain Release Technology .....  | Sentry Plus Stain Protection                   |
| Soil Release Technology.....    | Sentry Soil Protection                         |
| Backing Material.....           | Unibond Plus                                   |
| Indoor Air Quality .....        | Green Label Plus Certified # 3802              |
| NSF 140.....                    | Gold   |
| Width.....                      | 12' width (3.66m)                              |
| Pattern Repeat.....             | 18" (W) x 17" (L)                              |
| Flammability.....               | ASTM E 648 Class 1 (Glue Down)                 |
| Smoke Density.....              | ASTM E 662 Less than 450                       |
| Static Propensity .....         | AATCC-134 Under 3.5 KV                         |
| Warranties: Lifetime Limited    | Unibond Plus Warranty, Lifetime                |
| Limited Colorfastness to Light, | 10 Year Limited Colorfastness to               |
| Atmospheric Contaminants,       | 10 Year Stain Warranty, Lifetime Static        |

BROADLOOM

|                                 |  |
|---------------------------------|--|
| Brand.....                      | <b>Durkan</b>                                  |
| Style Name / Number .....       | <b>Linen Grid 36 / MH341</b>                   |
| Construction.....               | Tufted   |
| Surface Appearance.....         | Textured Patterned Cut & Loop                  |
| Gauge .....                     | 1/12" (47.00 rows per 10 cm)                   |
| Tufted Weight.....              | 36 oz/yd <sup>2</sup> (1085 g/m <sup>2</sup> ) |
| Dye Method.....                 | Solution Dyed                                  |
| Fiber Type .....                | Colorstrand® SD Nylon                          |
| Stain Release Technology .....  | Sentry Plus Stain Protection                   |
| Soil Release Technology.....    | Sentry Soil Protection                         |
| Backing Material.....           | Unibond Plus                                   |
| Indoor Air Quality .....        | Green Label Plus Certified # 3802              |
| NSF 140.....                    | Gold   |
| Width.....                      | 12' width (3.66m)                              |
| Pattern Repeat.....             | 18" (W) x 32.5" (L)                            |
| Flammability.....               | ASTM E 648 Class 1 (Glue Down)                 |
| Smoke Density.....              | ASTM E 662 Less than 450                       |
| Static Propensity .....         | AATCC-134 Under 3.5 KV                         |
| Warranties: Lifetime Limited    | Unibond Plus Warranty, Lifetime                |
| Limited Colorfastness to Light, | 10 Year Limited Colorfastness to               |
| Atmospheric Contaminants,       | 10 Year Stain Warranty, Lifetime Static        |



For Custom Patterns and Etchworks spec information,  
visit our website at [durkan.com](http://durkan.com)



Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

**These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.**

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Moving Along Collection are recommended at entryways to reduce soiling.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

**For current and complete specifications please visit [durkan.com](http://durkan.com)**



Produced with recycled materials