

Ш

Named after the Filipino word for "teacher," Matuto Plus Stone enhanced resilient tile features eye-catching colors that energize the space and stimulate creativity. Mix and match across the palette of the most popular school colors in the US – from fresh, youthful brights to an array of clean grounded neutrals. The 12" x 24" tiles are designed with a versatile concrete style visual and embossed texture, especially relevant in schools, healthcare settings and retail spaces. Matuto Plus Stone colorways are designed to coordinate across the Mohawk Group suite of products including soft and resilient surfaces, making it easy to create fluid transitions across flooring materials.



Cover: 123A Barely Beige Stone, 915A Frostbite Stone










Learn & Live COORDINATING CARPET TILE

Explore Learn & Live, a carpet tile collection inspired by biophilic concepts of complexity and order. Create unique installations where complexity and order ebbs and flows through the use of accent colors. Inspired by nature at a cellular level, Learn & Live Swipe Right carpet tile features organic patterns designed to define areas for study and thought while Side Stripe and Rise Up patterns ignite creativity and stimulation.

FEATURES

- 24" x 24" random and mergeable carpet tiles
- Minimizes purchasing large quantities of attic stock
- Easy and quick selective replacement of tiles
- Tiles are readily available for future renovation or expansion
- Duracolor® Tricor Premium Nylon
- EcoFlex NXT Backing
- Living Product Challenge Petal Certified
- Declared Red List Free

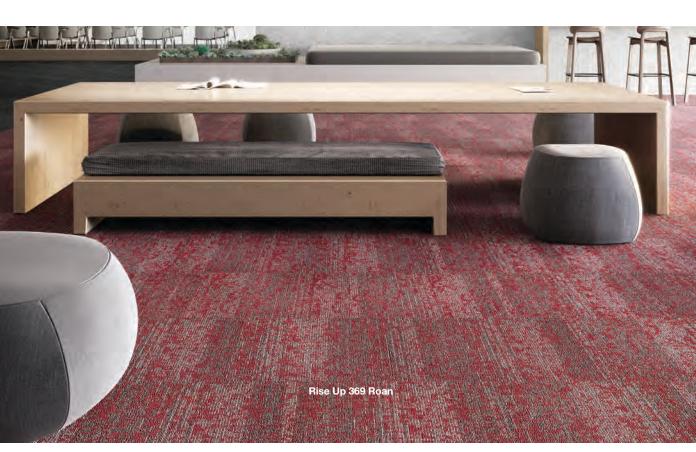




Matuto Plus Stone

FEATURES

- Full range of neutrals and brights that reflect the most popular school spirit colors in the US
- Versatile 12" x 24" tile size allows wide variety of installation patterns
- Concrete style visual with embossed texture
- Designed alongside our carpet collections creating fluid transitions and easy coordination across flooring materials
- 2.5mm overall thickness and 20 mil commercial wear layer for superior durability
- M-Force™ Ultra Enhanced Urethane finish for stain and wear resistance
- Polish-optional surface provides easy maintenance and lower life cycle cost than VCT
- FloorScore® certified

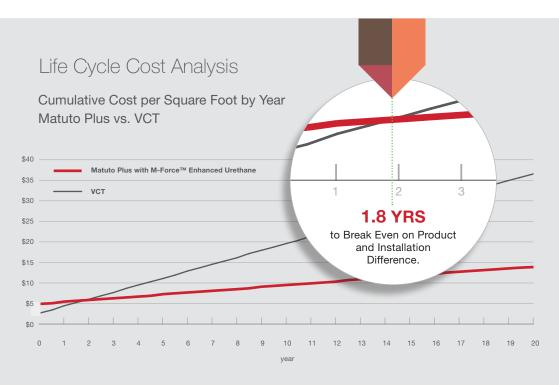

Matuto Plus enhanced resilient tile with M-Force™ Ultra Enhanced Urethane finish does not require polishing or waxing, which equates to significant cost savings over VCT. The payback occurs in as little as 2 years and compounds exponentially over the life of the installation.

^{*} Tiles may be polished if preferred by the end user.



Matuto Plus Stone Colorways





915A Frostbite Stone

Specifications

Matuto Plus Stone C0135

DESIGN

Overall Thickness 2.5mm (.1") Wear Layer 20 mil (0.5mm)

Finish M-Force™ Ultra Enhanced Urethane

Colors Available 16 Colors Size 12" W x 24" L

Packaging 36 sf/ctn (3.34m²/ctn); 18 pcs/ctn; 34 lbs/ctn (15.42 kg/ctn)

*For detailed warranty, adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction Commercial Grade Dry Back Enhanced Resilient Tile

Classification ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed

Squareness ASTM F2421 - Passes - ±0.10" max
Size and Tolerance ASTM F2421 - Passes - ±0.016"/linear foot
Thickness ASTM F386 - Passes - as specified ±0.005"

Flexibility ASTM F137 - Passes - 1" mandrel

Dimensional Stability ASTM F2199 - Passes - 0.020"/linear foot max Static Load Limit ASTM F970 - Passes - modified at 1500 psi

Residual Indentation ASTM F1914 - Passes - Average less than 8%, maximum single

reading 10%

Resistance to Chemicals ASTM F925 - Passes - No more than a slight change

SUSTAINABILITY

Certification FloorScore® Certified
Recycled Content 100% Virgin Vinyl



Mohawk Group

Matuto Plus Stone

Style Name Matuto Plus Stone

C0135 Style Number LVT Product Type

Size 12 in x 24 in

Feature	Description
Overall Thickness	2.5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force Ultra
Surface Profile	Overall Emboss
Squareness	ASTM F2421 - Passes - ±0.10" max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	36
Pounds per Carton	30.96
Classification	ASTM F1700 - Class III, Type B - Embos



Recommended Installation Methods











Monolithic Monolithic Stepping

Half Lap

Random

Brick Ashlar

Herringbone













Mohawk Group

Colorways



Barely Beige Stone

Color code: 123A Style number: C0135



Lemon Twist Stone

Color code: 131A Style number: C0135



Outrageous Orange St

Color code: 252A Style number: C0135



Red Hot Stone

Color code: 353A Style number: C0135



Wizard Stone

Color code: 454A Style number: C0135



Blue Night Stone

Color code: 555A Style number: C0135



Mega Blue Stone

Color code: 556A Style number: C0135



Deep Sea Stone

Color code: 599A Style number: C0135



Green Grass Stone

Color code: 646A Style number: C0135



Botany Stone

Color code: 656A
Style number: C0135



Nutshell Stone

Color code: 752A Style number: C0135



Bronze Blast Stone

Color code: 858A Style number: C0135



Frostbite Stone

Color code: 915A Style number: C0135



Agreeable Grey Stone

Color code: 926A
Style number: C0135



Sonic Silver Stone

Color code: 927A Style number: C0135



Grey Granite Stone

Color code: 959A Style number: C0135

Performance

Feature	Description
Static Load	ASTM F970 - Passes - modified at 1500 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - IE < 8
Resistance to Light	ASTM F1515 - Passes - IE < 8
Critical Radiant Flux	ASTM E648 - Passes - 🛘 0.45 watts/cm², Class 1
Smoke Density	ASTM E662 Part A - Less than 450











Sustainability

Feature	Description
Floor Score	Floor Score Certified
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO2e/ft2
Embodied Carbon	1.11 kg CO2e/ft2

Warranties

Limited 20 Year M-Force Ultra Commercial Warranty







